



RECESSED

PRODUCT MATERIAL	Die-cast aluminium
LIGHT SOURCE	Bridgelux V8
MODULE LIFETIME	Approx. 35.000 hours
DRIVER	Fixture excluding driver, SELECT OPTION
BEAM ANGLE	33°
ADJUSTABLE	No
SIZE	83 X 74mm


OPTIONS

OPTION DRIVERS 350mA	On/off	350mA 6-10W Art. no.: 0110.350.10.3
	Phase cut	350mA 5-10W Art. no.: 0110.350.30.1
	1/10V	350mA 5-10W Art. no.: 0110.350.30.1
	DALI	350mA 3-18W Art. no.: 0118.350.40.0
OPTION DRIVERS 500mA	On/off	500mA 6-10W Art. no.: 0110.500.10.2
	Phase cut	500mA 5-10W Art. no.: 0110.500.30.1
	1/10V	500mA 5-10W Art. no.: 0110.500.30.1
	DALI	500mA 4-18W Art. no.: 0118.500.40.0
OPTION POWER CABLE Connected to driver/fixture	Europlug 2000mm 2 X 0,75 Art. no.: 0502.075.20.0	
	Wieland GST 18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0	
	Wieland T connector GST 18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0	


INFORMATION

WARRANTY	3 Years
-----------------	---------


Full warranty only applies when fixture is purchased in combination with recommended driver.

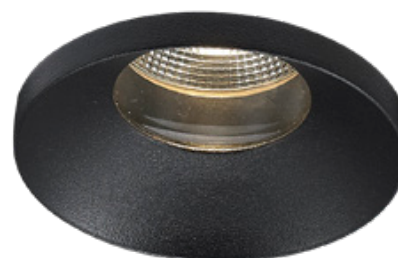

BLACK



Hole size



Technical drawing



WHITE

ART.NR.	COLOR	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME	mA
5350.997.33.3	white	V8 LED	Bridgelux	565lm	6,2W	91lm/W	2700K	>90	35.000 Hrs	350mA
5350.997.33.5	black	V8 LED	Bridgelux	565lm	6,2W	91lm/W	2700K	>90	35.000 Hrs	350mA
5500.997.33.3	white	V8 LED	Bridgelux	760lm	9,2W	82lm/W	2700K	>90	35.000 Hrs	500mA
5500.997.33.5	black	V8 LED	Bridgelux	760lm	9,2W	82lm/W	2700K	>90	35.000 Hrs	500mA