


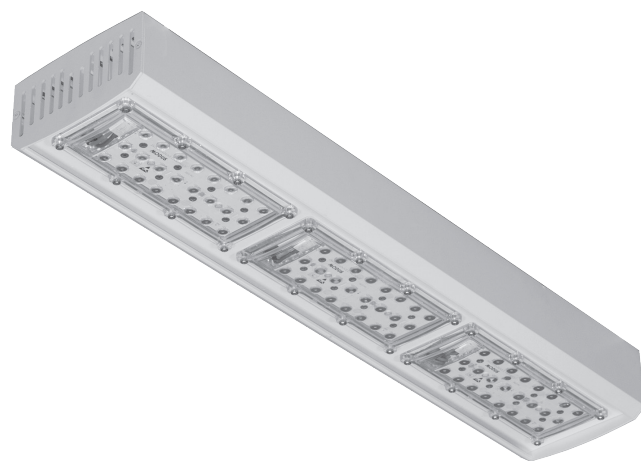

ALIN 300

Industrial LED Highbay

Body:

White painted aluminium body

Optical system:

clear PC lens

W - asymmetrical - wide beam 90°

N - symmetrical - narrow beam 30°

Application

Pendant luminaire for indoor and outdoor use

Variants:

ND - non dimmable

DALI - dimmable DALI

η_{ef} (lm/W)
123-132




2200	2700	3000	4000	5700	6500	MIX	RGB	
×	×	○	●	○	○	×	×	●
●	×	○	×	×	×	×	×	●

● standard



○ optional

× not possible


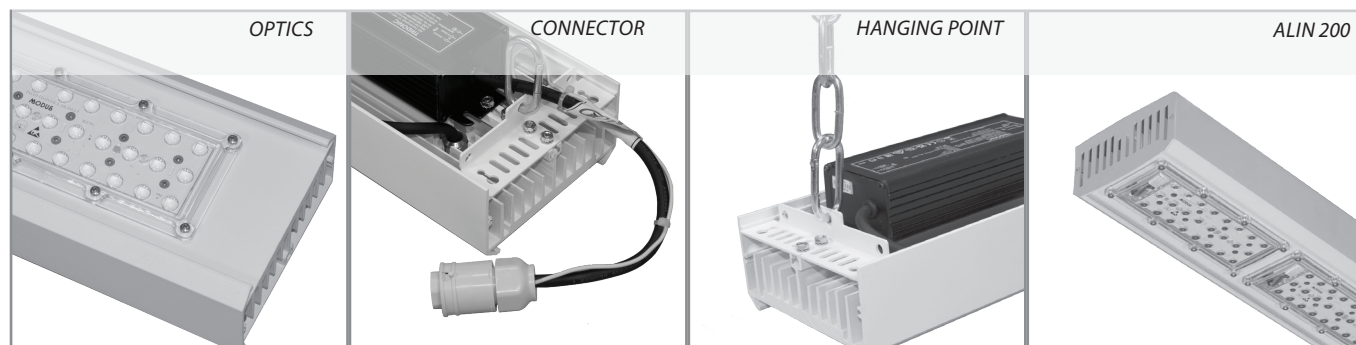


ALIN	W	lm		A	B	C	kg
		W	N				
ALIN 100	74	9 800	9 600	263	120	108	2,2
ALIN 200	158	20 500	20 000	469			3,6
ALIN 300	239	30 000	29 300	638			4,4
ALIN 400	310	43 000	42 000	925			5,1


lm -luminaire flux

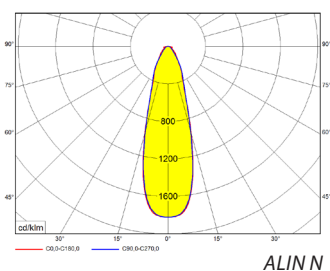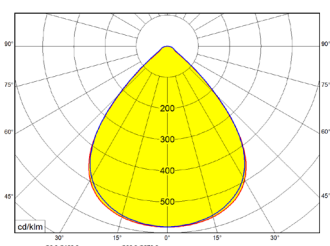


ALIN 100

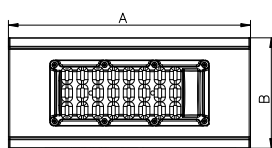


ALIN 200

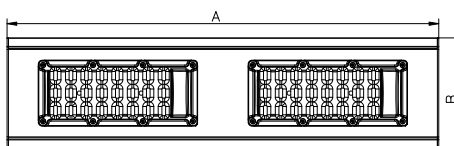

ALIN 300

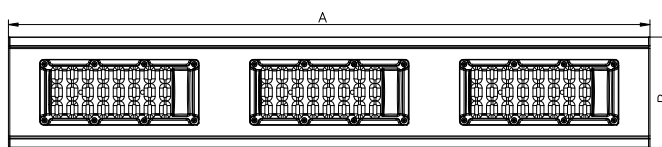

ALIN 400

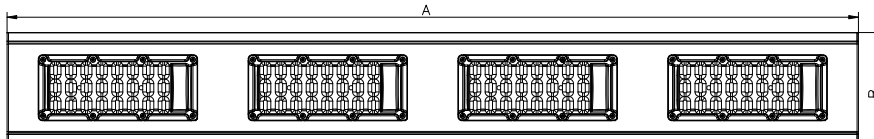

code marking of the luminaire: ALIN300L4N3B/ND

ALIN	300	L	4	N	3	B	/ND
type of luminaire	Luminaire power in hundreds of lm	S – short body M – middle body L – long body	chromatic temperature 3 = 3000K 4 = 4000K 5 = 5000K 6 = 6500	Optics N – narrow beam 60° W – wide beam 90°	Number of LED modules	Colour C – black S – gray B – white	ND – non dimmable DALI – dimmable DALI