

## Recessed LED fitting

### Body:

White painted (RAL 9016) metal sheet

### Optic:

KO - opal PS cover

### Application:

Recessed installation into a false ceiling



DS2000KO




$\eta_{\text{ef}}$  (lm/W)  
100-105

| 2200      | 2700  | 3000 | 4000      | 5700 | 6500 | MIX | RGB |   |
|-----------|-------|------|-----------|------|------|-----|-----|---|
| ×         | ○     | ○    | ●         | ○    | ×    | ×   | ×   | × |
| ON<br>OFF | 1-10V | DALI | Bluetooth |      |      |     |     |   |
| ●         | ×     | ○    | ○         | ×    | ×    | ×   | ○   | × |

● default


○ optional

× not possible

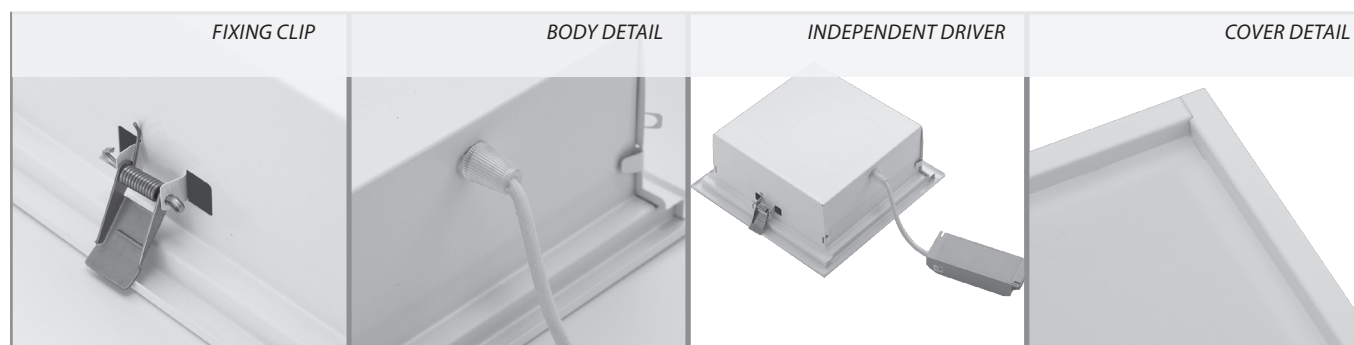

| DS     | W  | lm    | A   | B   | C  |         | kg  |
|--------|----|-------|-----|-----|----|---------|-----|
| DS1000 | 10 | 1 000 | 224 | 224 | 90 | 210x210 | 0,7 |
| DS2000 | 19 | 2 000 |     |     |    |         |     |

lm - luminaire light output



DS2000KO

