



ALT 080S

ALT 350L

η_{ef} (lm/W)
150-180

Industrial LED Highbay

Body:

Powder painted non-corrosive high-pressure die-cast aluminium finished in black color, optionally in white

Optic:


Symetric glare-free optic lens

N - narrow beam 60°

W - wide beam 90°

Application:

Luminaire for indoor application

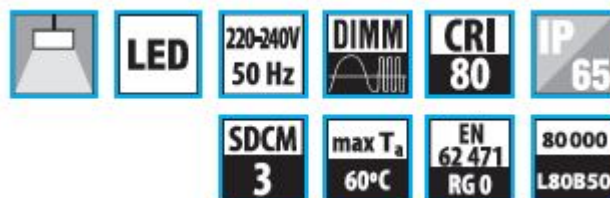

2200	2700	3000	4000	5700	6500	MIX	RGB	
×	×	○	●	○	○	×	×	●
ON OFF	1-10V	DALI	Bluetooth	Mesh	Beam	INT	EXT	Beam
●	×	○	×	×	×	×	×	●








● default

○ optional

×



ALT	W	lm		A	B	C	R	S	kg
		W	N						
ALT 080S	46	7 200	6 900	400	120	90	345	90	3,0
ALT 150XM	88	15 500	14 900	750			695		4,5
ALT 250M	125	22 200	21 300	1090			1035		6,5
ALT 350L	182	32 800	31 500	1450			1395		9,0

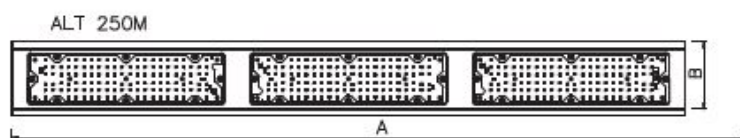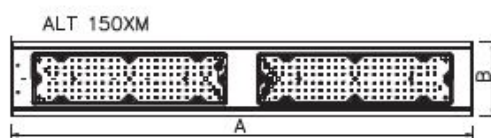

Codes: ALT250M3/4W90C/ND

ALT	250	M	3	/4	W90	C	/ND
Luminaire type							
Light output (x100 lm)							
Body size:							
		S – 400 mm					
		XM – 750 mm					
		M – 1090 mm					
		L – 1450mm					
Color temperature							
		3 = 3000K,					
		4 = 4000K,					
		5 = 5700K,					
		6 = 6500K					
Nr of LED modules							
Optic:							
		N – narrow beam 60°,					
		W – wide beam 90°					
Color:							
		C = black					
		B = white					
Drivertype:							
		ND – no dimmable					
		DALI – dimmable DALI					