




PRODUCT MATERIAL	Aluminium profile
LIGHT SOURCE	Philips Ledline
MODULE LIFETIME	Approx. 50.000 hours
DRIVER LEDLINE	Including Philips Xitanium driver
COLORS (Δ)	<input type="radio"/> 3 = RAL 9003 white <input checked="" type="radio"/> 5 = RAL 9005 black <input type="radio"/> 6 = RAL 9006 alu
REFLECTOR	Aluminium white
ADJUSTABLE	No
SIZE	see technical drawing BxH: 60x80mm

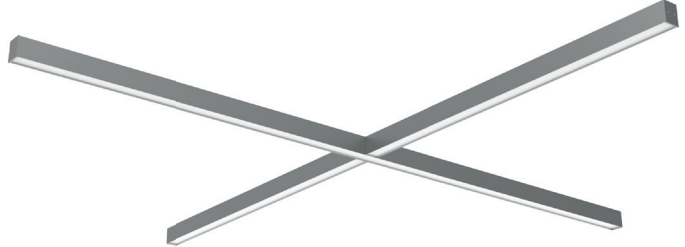

OPTIONS

COLORS	Available in all RAL colours on request Additional price + 10%
EMERGENCY BALLAST	Art. nr.: 0187.003.01.0 - 1 hour
DIMMABLE	DALI dimmable On request
DIFFUSER	White acrylic diffuser in standard Acrylic frosted, microprismatic or any other on request
IP CLASS	IP20 in standard, IP44 on request
MOVEMENT SENSOR	On request
DAYLIGHT CONTROL SENSOR	On request

INFORMATION


WARRANTY	5 Years
-----------------	---------

Suspended, standard 1,5m steel wire suspension included

We can produce this luminaire in different lengths and shapes on request

LiteTime International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

PROFILE X

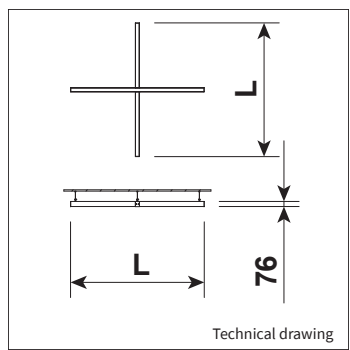

ART.NR.	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME	LENGTH
Δ see colors									
9262.114.30.Δ	Ledline	Philips	8800lm	60W	147lm/W	3000K	>80	50.000 Hrs	1149mm
9262.114.40.Δ	Ledline	Philips	8800lm	60W	147lm/W	4000K	>80	50.000 Hrs	1149mm
9262.172.30.Δ	Ledline	Philips	13200lm	92W	143lm/W	3000K	>80	50.000 Hrs	1722mm
9262.172.40.Δ	Ledline	Philips	13200lm	92W	143lm/W	4000K	>80	50.000 Hrs	1722mm
9262.229.30.Δ	Ledline	Philips	17600lm	116W	152lm/W	3000K	>80	50.000 Hrs	2298mm
9262.229.40.Δ	Ledline	Philips	17600lm	116W	152lm/W	4000K	>80	50.000 Hrs	2298mm
9262.287.30.Δ	Ledline	Philips	22000lm	144W	153lm/W	3000K	>80	50.000 Hrs	2870mm
9262.287.40.Δ	Ledline	Philips	22000lm	144W	153lm/W	4000K	>80	50.000 Hrs	2870mm