




<b>PRODUCT MATERIAL</b>	Die-cast aluminium
<b>LIGHT SOURCE</b>	Bridgelux DtW
<b>DRIVER</b>	Including phase cut dimmable driver
<b>COLORS (Δ)</b>	○ 3 = RAL 9003 white ● 5 = RAL 9005 black
<b>BEAM ANGLE</b>	▲ 24°
<b>ADJUSTABLE</b>	Rotating 350°, 55° tiltable
<b>DIMMABLE</b>	Yes
<b>SIZE</b>	96 X 59mm



**OPTIONS**

<b>OPTIONAL BEAM ANGLE</b>	▲ 36° Art. no.: 3066.010.36.0 ▲ 50° Art. no.: 3066.010.50.0
<b>ANTI-GLARE RING</b>	Black anti-glare ring Gold mat anti-glare ring Art. no.: 3066.030.00.9
<b>HONEYCOMB</b>	Art. no.: 3066.040.00.0
<b>OPTIONS DRIVERS</b>	<b>1/10V</b> 250mA 11W Art. no.: 0111.250.30.0 <b>DALI</b> 250mA 6-13,5W Art. no.: 0114.250.40.1
<b>OPTION POWER CABLE</b> Connected to driver/fixture	Europlug 2000mm 2 X 0,75 Art. no.: 0502.075.20.0 Wieland GST 18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0 Wieland T connector GST 18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0

VENUS R MINI

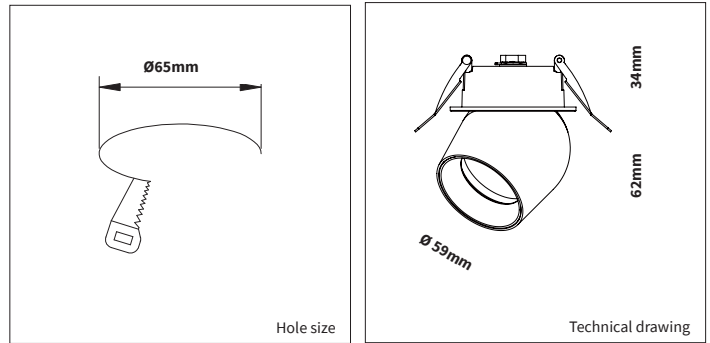

**INFORMATION**

<b>WARRANTY</b>	3 Years
-----------------	---------

Also available in surface and track version

LiteTime reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.



Anti-glare ring



Honeycomb

ART.NR.	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME	mA
4066.125.24.Δ	DtW	Bridgelux	900lm	10W	90lm/W	1800-3000K	DTW >90	50.000 Hrs	250mA

Δ see colors