



STICK

PRODUCT MATERIAL	Die-cast Aluminium
LIGHT SOURCE	Bridgelux V6 Array
MODULE LIFETIME	Approx. 35.000 hours
DRIVER	Fixture excluding driver, SELECT OPTION
COLORS (Δ)	<input checked="" type="radio"/> 35 = RAL 9003 white + RAL 9005 black <input type="radio"/> 5 = RAL 9005 black
BEAM ANGLE	20°
ADJUSTABLE	Yes - 0-20° - 360°
SIZE	92 X 92mm



OPTIONS


OPTIONAL BEAM ANGLE	26° Art. no.: 4912.010.26.0
OPTIONAL BEAM ANGLE	36° Art. no.: 4912.010.36.0
ANTI-GLARE RING	Black anti-glare ring White anti-glare ring Art. no.: 4912.922.99.3 Gold anti-glare ring Art. no.: 4912.922.99.9
GLASS	Prismatic Art. no.: 4912.933.94.0 Frosted Art. no.: 4912.933.90.0 Striped Art. no.: 4912.933.96.0
HONEYCOMB	Art. no.: 4912.933.91.0
DRIVER OPTIONS 350mA	On/off 350mA 6-10W Art. no.: 0110.350.10.3
	Phase cut 350mA 5-10W Art. no.: 00110.350.30.1
	1/10V 350mA 5-10W Art. no.: 0110.350.30.1
	DALI 350mA 3-18W Art. no.: 0118.350.40.0
DRIVER OPTIONS 700mA	On/off 700mA 6-9W Art. no.: 0109.700.10.0
	Phase cut 700mA 5-10W Art. no.: 0110.700.20.0
	1/10V 700mA 6-10W Art. no.: 0110.700.30.1
	DALI 700mA 5-18W Art. no.: 0118.700.40.0
POWER CABLE OPTIONS Connected to driver/fixture	Europlug 2000mm 2 X 0,75 Art. no.: 0502.075.20.0
	Wieland GST 18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0
	Wieland T connector GST 18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0

INFORMATION

Full warranty only applies when fixture is purchased in combination with recommended driver.

LiteTime International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

STICK

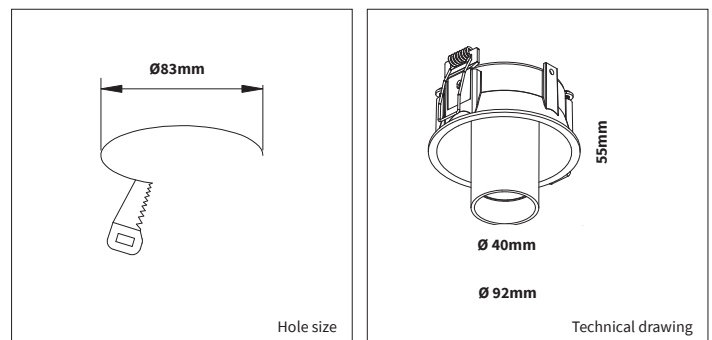

Anti-glare ring



Striped

Frosted

Prismatic



Honeycomb

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
Δ See colors									
4917.350.26.Δ	V6 Array	Bridgelux	320lm	3,2W	100lm/W	2700K	>90	35.000 Hrs	350mA
4917.700.26.Δ	V6 Array	Bridgelux	565lm	6,7W	84lm/W	2700K	>90	35.000 Hrs	700mA