



QUBIC 1

PRODUCT MATERIAL	Steel
LIGHT SOURCE	LMR50
MODULE LIFETIME	Approx. 30.000 hours
DRIVER	Fixture excluding driver, select option
COLORS (Δ)	<input type="radio"/> 3 = RAL 9003 white <input type="radio"/> 77 = RAL 7037 light grey <input type="radio"/> 7 = RAL 7043 anthracite <input type="radio"/> 5 = RAL 9005 black
BEAM ANGLE	<input type="radio"/> 20° <input type="radio"/> 30°
ADJUSTABLE	Yes
SIZE	115 X 115 X 123mm




OPTIONS LMR50

COLORS	The standard colors, as stated above, can be combined with the fixture inside / outside No additional price
	Available in all RAL colors and color combinations on request Additional price 10%
GLASS COVER CLEAR	Glass IP44 Art. no.: 0053.999.99.0
OPTION DRIVERS	On/off 350mA 6-10W Art. no.: 0110.350.10.3
	Phase cut 350mA 5-10W Art. no.: 0110.350.30.1
	1/10V 350mA 5-10W Art. no.: 0110.350.30.1
	DALI 350mA 3-18W Art. no.: 0118.350.40.0



QUBIC 1

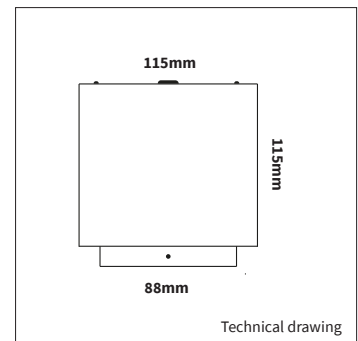

INFORMATION

WARRANTY	3 Years
-----------------	---------

Full warranty only applies when fixture is purchased in combination with recommended driver.

LiteTime International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

ART.NR.	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME	BEAM ANGLE	mA
Δ see colors										
4612.171.20.Δ	LMR50	Bridgelux V6	575lm	6,8W	85lm/W	2700K	>90	30.000 Hrs	20°	350mA
4612.172.30.Δ	LMR50	Bridgelux V6	575m	6,8W	85lm/W	2700K	>90	30.000 Hrs	30°	350mA
4612.173.20.Δ	LMR50	Bridgelux V6	600lm	6,8W	88lm/W	3000K	>90	30.000 Hrs	20°	350mA
4612.174.30.Δ	LMR50	Bridgelux V6	600lm	6,8W	88lm/W	3000K	>90	30.000 Hrs	30°	350mA
4612.175.20.Δ	LMR50	Sharp GW6	563lm	6,6W	85lm/W	2000 - 2800K	>80	30.000 Hrs	20°	350mA
4612.176.30.Δ	LMR50	Sharp GW6	563lm	6,6W	85lm/W	2000 - 2800K	>80	30.000 Hrs	30°	350mA