



| | |
|-------------------------|---|
| PRODUCT MATERIAL | Die-cast aluminium |
| LIGHT SOURCE | Osram |
| DRIVER | Including phase cut dimmable driver |
| COLORS (Δ) | <input type="radio"/> 3 = RAL 9003 white <input checked="" type="radio"/> 5 = RAL 9005 black |
| BEAM ANGLE | |
| ADJUSTABLE | No |
| DIMMABLE | Yes |
| SIZE | 93 X 93 X 47mm |



OPTIONS

| | | |
|--|---|--|
| OPTION DRIVERS | 1/10V | 350mA 1-15W Art. no.: 0115.350.30.0 |
| | DALI | 350mA 7-19W Art. no.: 0120.350.40.0 |
| OPTION POWER CABLE Connected to driver/fixture | Europlug 2000mm 2 X 0,75 Art. no.: 0502.075.20.0 | |
| | Wieland GST 18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0 | |
| | Wieland T connector GST 18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0 | |

QUADRI 4



INFORMATION

| | |
|-----------------|------------------|
| WARRANTY | 5 years warranty |
|-----------------|------------------|

This luminaire is equipped with an innovative lens technology instead of a reflector
High quality LED lens technology + 10% more light output

Full warranty only applies when fixture is purchased in combination with recommended driver.

LiteTime International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

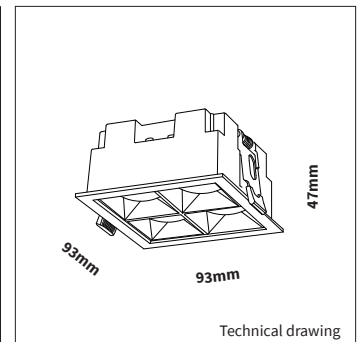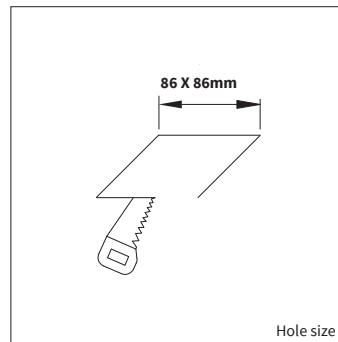

| ART.NR. | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOUR TEMPERATURE | CRI | TC LIFETIME | mA |
|---------------|-----------|-------|---------------|--------------|-------------------|--------------------|-----|-------------|-------|
| Δ see colors | | | | | | | | | |
| 4417.235.24.Δ | 5050 | Cree | 1500lm | 14W | 107lm/W | 2700K | >90 | 50.000 Hrs | 350mA |
| 4417.335.24.Δ | 5050 | Cree | 1500lm | 14W | 107lm/W | 3000K | >90 | 50.000 Hrs | 350mA |