




PRODUCT MATERIAL	Aluminium profile
LIGHT SOURCE	Philips Ledline
MODULE LIFETIME	Approx. 50.000 hours
DRIVER	Including driver
COLORS (Δ)	<input type="radio"/> 3 = RAL 9003 white <input checked="" type="radio"/> 5 = RAL 9005 black <input type="radio"/> 6 = RAL 9006 alu
REFLECTOR	Aluminium white
SIZE	1269 X 587 / 1550X 868mm BxH: 60x80mm

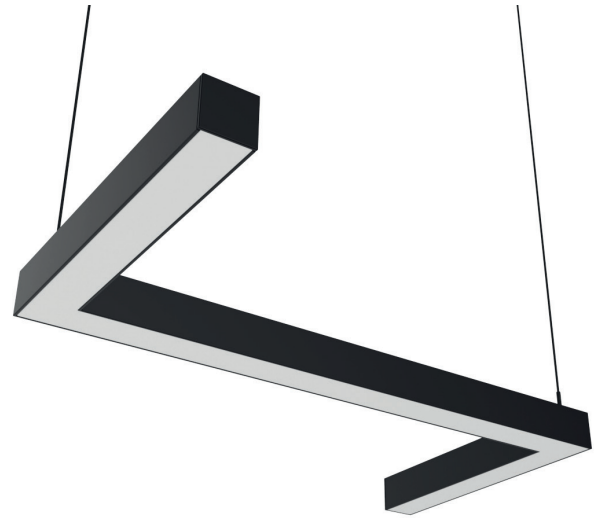

OPTIONS

COLORS	Available in all RAL colours on request Additional price + 10%
EMERGENCY BALLAST	Art. nr.: 0187.003.01.0 - 1 hour
DIMMABLE	DALI dimmable On request
DIFFUSER	White acrylic diffuser in standard Acrylic frosted, microprismatic or any other on request
UGR DIFFUSER	UGR<19 diffuser on request
IP CLASS	IP20 in standard, IP44 on request
MOVEMENT SENSOR	On request
DAYLIGHT CONTROL SENSOR	On request

PROFILE Z



INFORMATION

WARRANTY	5 Years
-----------------	---------


Suspended, suspension wires included

We can produce this luminaire in different lengths and shapes on request

LiteTime International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

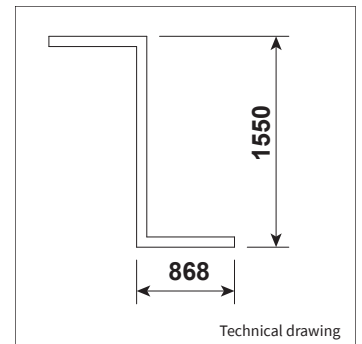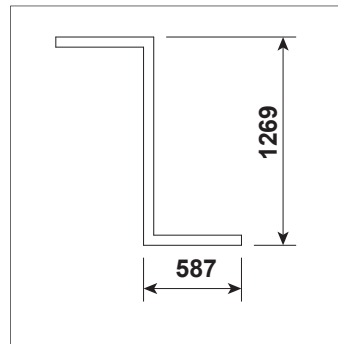

Technical drawing

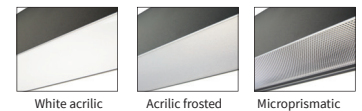

White acrylic Acrylic frosted Microprismatic

ART.NR.	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	LENGTH	TC LIFETIME
Δ see colors									
9264.126.30.Δ	Ledline	Philips	8800lm	59W	149lm/W	3000K	>80	1269mm	50.000 Hrs
9264.126.30.Δ	Ledline	Philips	8800lm	59W	149lm/W	4000K	>80	1269mm	50.000 Hrs
9264.155.30.Δ	Ledline	Philips	12100lm	82W	148lm/W	3000K	>80	1550mm	50.000 Hrs
9264.155.40.Δ	Ledline	Philips	12100lm	82W	148lm/W	4000K	>80	1550mm	50.000 Hrs