




PROFILE 6 W UP/DN


PRODUCT MATERIAL	Aluminium profile
LIGHT SOURCE	Philips Ledline
MODULE LIFETIME	Approx. 50.000 hours
DRIVER LEDLINE	Including standard xitanium driver
COLORS (Δ)	<input type="radio"/> 3 = RAL 9003 white <input checked="" type="radio"/> 5 = RAL 9005 black <input type="radio"/> 6 = RAL 9006 alu
REFLECTOR	Aluminium white
ADJUSTABLE	No
SIZE	587 X 121 X 76mm / 868 X 121 X 76mm

OPTIONS

COLORS	Available in all RAL colours on request Additional price + 10%	
EMERGENCY BALLAST	0187.003.01.0 - 1 hour	€ 180,00
DIMMABLE	DALI dimmable	€ 60,00
DIFFUSER	White acrylic diffuser in standard Acrylic frosted, microprismatic or any other on request	
UGR DIFFUSER	UGR<19 diffuser on request	
IP CLASS	IP20 in standard, IP44 on request	
MOVEMENT SENSOR	On request	
DAYLIGHT CONTROL SENSOR	On request	

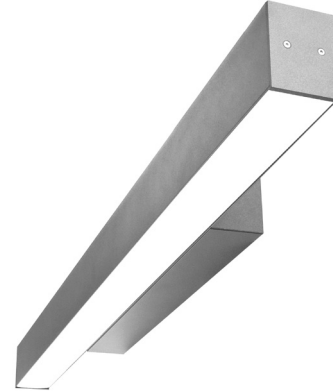

PROFILE 6 UP/DN

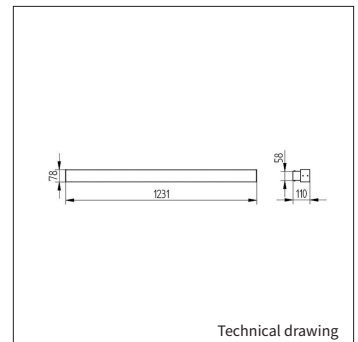

Technical drawing

INFORMATION

WARRANTY	5 Years
-----------------	---------

Wall mounted direct/indirect LED luminaire

LiteTime International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.



White acrylic Acrylic frosted Microprismatic

ART.NR.	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME	LENGTH
Δ see colors									
9016.197.91.Δ	Ledline	Philips	4400lm	30W	147lm/W	3000K	>80	50.000 Hrs	587mm
9016.198.91.Δ	Ledline	Philips	4400lm	30W	147lm/W	4000K	>80	50.000 Hrs	587mm
9017.197.91.Δ	Ledline	Philips	8800lm	58W	151lm/W	3000K	>80	50.000 Hrs	868mm
9017.198.91.Δ	Ledline	Philips	8800lm	58W	151lm/W	4000K	>80	50.000 Hrs	868mm