



PROFILE 6 R



PRODUCT MATERIAL	Aluminium profile
LIGHT SOURCE	Philips Ledline
MODULE LIFETIME	Approx. 50.000 hours
DRIVER LEDLINE	Including Philips Xitanium driver
CCOLORS (Δ)	<input type="radio"/> 3 = RAL 9003 white <input type="radio"/> 5 = RAL 9005 black <input type="radio"/> 6 = RAL 9006 alu
REFLECTOR	Aluminium white
ADJUSTABLE	No
SIZE	601/882/1163/1444 X 64 X 64mm



OPTIONS

COLORS	Available in all RAL colours on request Additional price + 10%
DIMMABLE	Dali dimmable
DIFFUSER	White opalic diffuser in standard Microprismatic UGR<19 option
IP CLASS	IP20 in standard, IP44 on request
COLOUR RENDERING INDEX	>80 in standard, other on request
MOVEMENT SENSOR	See intelligent lighting
DAYLIGHT CONTROL SENSOR	See intelligent lighting
TUNABLE WHITE	On request
CES	On request

INFORMATION



WARRANTY	5 Years
-----------------	---------

This luminaire can be mounted directly in to the ceiling and can be connected to form long LED lighting lines. Mounting brackets included.

Bespoke size & product features available

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

PROFILE 6 R

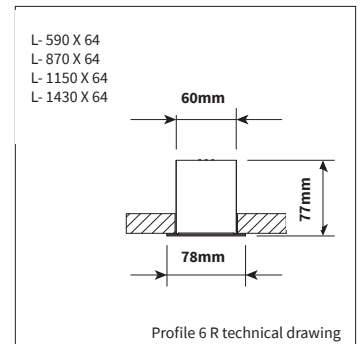

White opalic

Microprismatic

ART.NR.	LENGTH	NETTO LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME
Δ see colors							
0000.000.00.Δ	601mm	1450lm	14W	104lm/W	3000K	>80	50.000 Hrs
0000.000.00.Δ	601mm	1450lm	14W	104lm/W	3500K	>80	50.000 Hrs
0000.000.00.Δ	601mm	1450lm	14W	104lm/W	4000K	>80	50.000 Hrs
0000.000.00.Δ	882mm	2300lm	22W	105lm/W	3000K	>80	50.000 Hrs
0000.000.00.Δ	882mm	2300lm	22W	105lm/W	3500K	>80	50.000 Hrs
0000.000.00.Δ	882mm	2300lm	22W	105lm/W	4000K	>80	50.000 Hrs
0000.000.00.Δ	1163mm	3000lm	28W	107lm/W	3000K	>80	50.000 Hrs
0000.000.00.Δ	1163mm	3000lm	28W	107lm/W	3500K	>80	50.000 Hrs
0000.000.00.Δ	1163mm	3000lm	28W	107lm/W	4000K	>80	50.000 Hrs
0000.000.00.Δ	1444mm	3800lm	34W	112lm/W	3000K	>80	50.000 Hrs
0000.000.00.Δ	1444mm	3800lm	34W	112lm/W	3500K	>80	50.000 Hrs
0000.000.00.Δ	1444mm	3800lm	34W	112lm/W	4000K	>80	50.000 Hrs
0000.000.00.Δ	1163mm	5600lm	51W	110lm/W	3000K	>80	50.000 Hrs
0000.000.00.Δ	1163mm	5600lm	51W	110lm/W	3500K	>80	50.000 Hrs
0000.000.00.Δ	1163mm	5600lm	51W	110lm/W	4000K	>80	50.000 Hrs
0000.000.00.Δ	1444mm	7000lm	63W	111lm/W	3000K	>80	50.000 Hrs
0000.000.00.Δ	1444mm	7000lm	63W	111lm/W	3500K	>80	50.000 Hrs
0000.000.00.Δ	1444mm	7000lm	63W	111lm/W	4000K	>80	50.000 Hrs