

NITRO 10

PRODUCT MATERIAL	Die-cast aluminium and steel
LIGHT SOURCE	LMR50
MODULE LIFETIME	Approx. 30.000 hours
DRIVER	Fixture excluding driver, SELECT OPTION
COLORS (Δ)	☐ 3 = RAL 9003 white ☒ 5 = RAL 9005 black ☐ 6 = RAL 9006 alu
BEAM ANGLE	 20°  30°
ADJUSTABLE	Yes
SIZE	106 x 106 X 80mm



OPTIONS LMR50

GLASS COVER CLEAR	Glass IP44 Art. no.: 0053.999.99.0
OPTION DRIVERS	On/off 350mA 6-10W Art. no.: 0110.350.10.3
	Phase cut 350mA 5-10W Art. no.: 0110.350.30.1
	1/10V 350mA 5-10W Art. no.: 0110.350.30.1
	DALI 350mA 3-18W Art. no.: 0118.350.40.0
OPTION POWER CABLE Connected to driver/fixture	Europlug 2000mm 2 X 0,75 Art. no.: 0502.075.20.0
	Wieland GST 18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0
	Wieland T connector GST 18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0

INFORMATION


WARRANTY	3 Years
-----------------	---------

Full warranty only applies when fixture is purchased in combination with recommended driver.

Including an assemble plate to mount a single unit into a double, triple, quadruple or "L" shape unit easily in a short time

LiteTime International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

NITRO 10

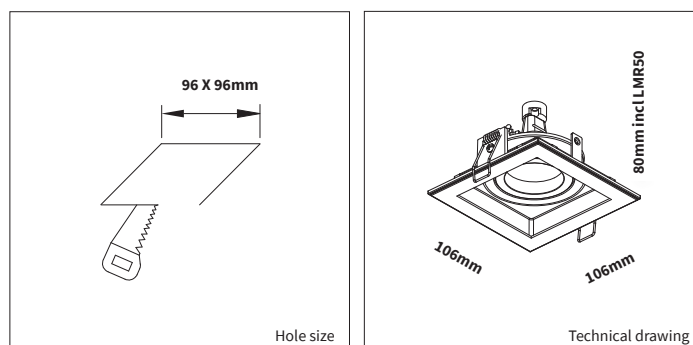

ART.NR.	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME	BEAM ANGLE	mA
Δ see colors										
4910.171.20.Δ	LMR50	Bridgelux V6	575lm	6,8W	85lm/W	2700K	>90	30.000 Hrs	20°	350mA
4910.172.30.Δ	LMR50	Bridgelux V6	575lm	6,8W	85lm/W	2700K	>90	30.000 Hrs	30°	350mA
4910.173.20.Δ	LMR50	Bridgelux V6	600lm	6,8W	88lm/W	3000K	>90	30.000 Hrs	20°	350mA
4910.174.30.Δ	LMR50	Bridgelux V6	600lm	6,8W	88lm/W	3000K	>90	30.000 Hrs	30°	350mA
4910.175.20.Δ	LMR50	Sharp GW6	563lm	6,6W	85lm/W	2000 - 2800K	 >80	30.000 Hrs	20°	350mA
4910.176.30.Δ	LMR50	Sharp GW6	563lm	6,6W	85lm/W	2000 - 2800K	 >80	30.000 Hrs	30°	350mA