

Colours	□ ■
Housing	Aluminium
Fixture type	Track light
Module	OSRAM LED Linear inside
Driver	OSRAM Optotronic
Light Output module	4500lm, 6000lm, 14000lm*
CCT	3000K, 4000K*
CRI	>80Ra
Beam angles	30°, 60°, 90° (Symetric or A-Symetric)
Adapter	Powergear® 3-phase adapter
Rotatable	0°
Tiltable	0°
LED modules	Standard
Dimming Options	N/A
Options	PMMA Transparant, Translucent
Expected Lifetime	50.000h (L80/B10)
Photobiological safety	RG1 unlimited
Power factor	> 0.9
LOR	> 90%
UGR	< 19
Colour consistency.	3 SDCM
Warranty	5 years warranty




Net Weight	Dimensions carton L x W x H	Qty outer carton
2900 grams	122 x 9 x 9 cm	6

* Other specific lumen output or CCT possible upon request

Available LED Modules

Description	Lumen	Watt	Lm/W	CCT	CRI
OSRAM PrevaLED BAR G3	4500lm	27W	166	830, 840	>80
OSRAM PrevaLED BAR G3	6000lm	47W	128	830, 840	>80
OSRAM PrevaLED BAR G3	14000lm			830, 840	>80

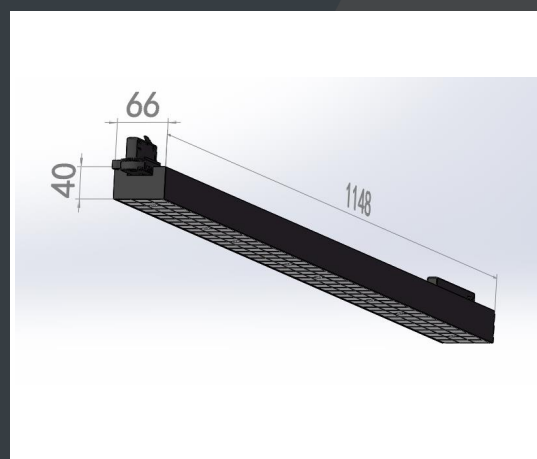

LED modules:

¹⁾ Lumen output of LED module (COB)

²⁾ Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT.

The power of the complete fixture will be slightly higher due to the power consumption of the driver.

³⁾ Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour temperature is subject to a tolerance of up to +/- 150 Kelvin compared to the nominal value.

Technical data can be changed by Internova without prior notice.