


| | |
|------------------------|---|
| Colours | □ ■ |
| Housing | Aluminium, die cast |
| Fixture type | Recessed, frameless |
| Module | CREE LED module |
| Driver | OSRAM (TRIAC dimmable) |
| Light Output module | 800lm, 1400lm* |
| CCT | 2700K, 3000K, 4000K* |
| CRI | >80Ra (3000K), >90Ra (2700K or 4000K) |
| Beam angles | 24° |
| Rotatable | 350° |
| Tiltable | 30° |
| LED modules | Standard |
| Dimming Options | TRIAC (standard), DALI |
| Options | N/A |
| Expected Lifetime | 35.000h (L70/B30) |
| Cut out Size | Ø100 x H97 |
| Photobiological safety | RG1 unlimited |
| Power factor | > 0.9 |
| LOR | > 90% |
| Colour consistency. | 3 SDCM |
| Warranty | 3 years warranty on LED module and driver |

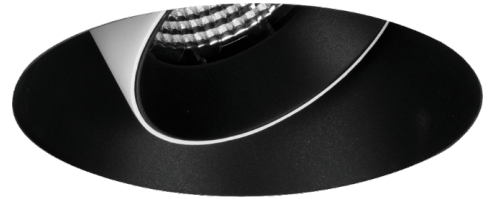


| Net Weight | Dimensions carton L x W x H | Qty outer carton |
|------------|-----------------------------|------------------|
| 471 grams | 15 x 13 x 12 cm | 18 |

* Other specific lumen output or CCT possible upon request

Available LED Modules

| Description | Lumen | Watt | Lm/W | CCT | CRI |
|-------------|--------|------|------|-----------------|----------|
| CREE LED's | 800lm | 7W | 114 | 927, 830, 940PW | >80, >90 |
| CREE LED's | 1400lm | 13W | 108 | 927, 830, 940PW | >80, >90 |

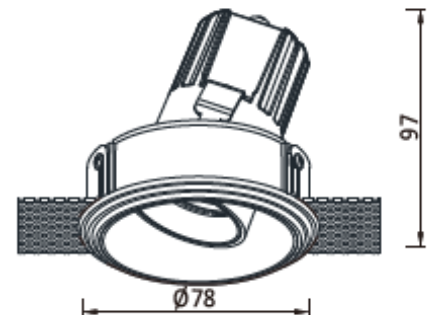

LED modules:

¹⁾ Lumen output of LED module (COB)

²⁾ Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT.

The power of the complete fixture will be slightly higher due to the power consumption of the driver.

³⁾ Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour temperature is subject to a tolerance of up to +/- 150 Kelvin compared to the nominal value.

Technical data can be changed by Internova without prior notice.