



ESCAPE SQUARE

PRODUCT MATERIAL	Thermoplastic housing
LIGHTSOURCE	LED
LED COOLING	Passive cooling
COLORS (Δ)	3 = RAL 9003 white
VIEWING ANGLE	Open area
SIZE	140 X 125 X 38MM


INFORMATION

COLOUR TEMP.	6000K
MOUNTING OPTIONS	Wall / surface / 3F railsystem
MAINTENANT	Non-maintenant
AUTO TEST	Yes
EMERGENCY BATTERY	Including sealed nickel-cadmium rechargeable battery pack (1Hr.)
EN STANDARD	On request



LiteTime International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources.

ESCAPE SQUARE

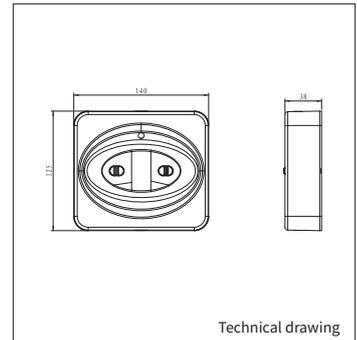

ART.NR.	LAMP TYPE	LIGHT OUTPUT	EMERGENCY LUMEN OUTPUT	MODULE POWER	BATTERY CHARGE DURATION	BATTERY LIFETIME WHEN DISCONNECTED	BATTERY	VIEWING DISTANCE
0554.999.18.3	LED	180LM	1Hrs / 180LM	2 X 3W	24 Hrs	1 Hr	Ni_Cd 7.2v 800mA	Escape Route
0554.300.33.3	LED (3 phase)	180LM	1Hrs / 180LM	2 X 3W	24 Hrs	1 Hr	Ni_Cd 7.2v 800mA	Escape Route