


**LiteTime**

LED Innovation **Technology** & Engineering

# TUBULAR MT50 LED IP67 INTEGRAL DRIVER



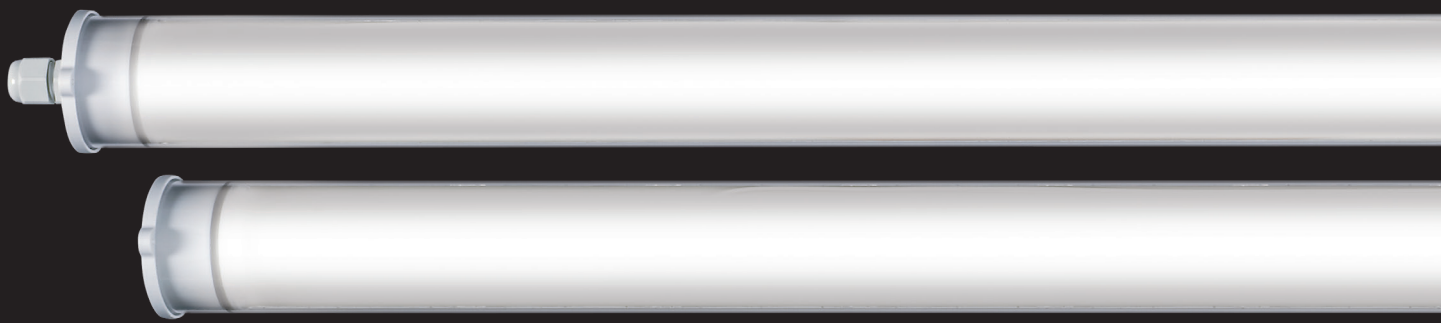

## Suspended/Surface mounted, Tubular LED light, with grey or black IP67 end caps.

### A SLIM DESIGNED LED FITTING.

The MT50 LED IP67 is a slim designed LED fitting that can be used internally and externally. The satin or clear diffusers will enhance any modern space. The lights can be suspended horizontally or surface mounted. The cylindrical tube offers a 180° distribution of light through its polycarbonate diffuser.

The MT50 LED IP67 is an incredibly versatile linear lighting solution, it makes use of efficient LED technology offering switched or Dali dimming options for a controllable level of light output.

Suitable for damp/wet areas, not intended for permanent submersion.

#### Light Source Information

- LED/Electronic Driver.
- Available in 3000K & 4000K.

#### Options

- 3hr Emergency with Dali monitoring.
- Grey or black IP67 end caps.
- Available as through wired and plug and go.

Emergency available from size 4 upwards, HE only. Through wired and plug & go add 30mm to the length.

#### Dimming

1-10V or Dali.

#### Installation

Horizontal, angled suspension or surface mounted.

#### Optics

Satin or clear polycarbonate diffuser.



Grey End Cap



Tear Drop Suspension Kit



Plastic & Stainless Steel Clamps

Cat No.	Length (mm)	Lumens Clear	Lumens Satin	Circuit Power (W)
<b>HIGH EFFICIENCY</b>				
MT50 LED 2 HE	655	1250	1340	12
MT50 LED 3 HE	935	1950	1820	15
MT50 LED 4 HE	1215	2600	2040	20
MT50 LED 5 HE	1495	3410	3640	23
MT50 LED 6 HE	1775	4045	3670	27
MT50 LED 7 HE	2055	4700	4510	31
MT50 LED 8 HE	2335	5190	5260	34
<b>HIGH OUTPUT</b>				
MT50 LED 2 HO	655	3015	2555	19
MT50 LED 3 HO	935	3690	4190	27
MT50 LED 4 HO	1215	5240	5400	35
MT50 LED 5 HO	1495	5630	6590	43
MT50 LED 6 HO	1775	6765	8015	49
MT50 LED 7 HO	2055	8810	8110	60
MT50 LED 8 HO	2335	9680	9680	65



Light output 180°

For further information

[www.litetime.be](http://www.litetime.be)