

## Linear & Trunking


Surface



Recessed




Slim 'Metro'

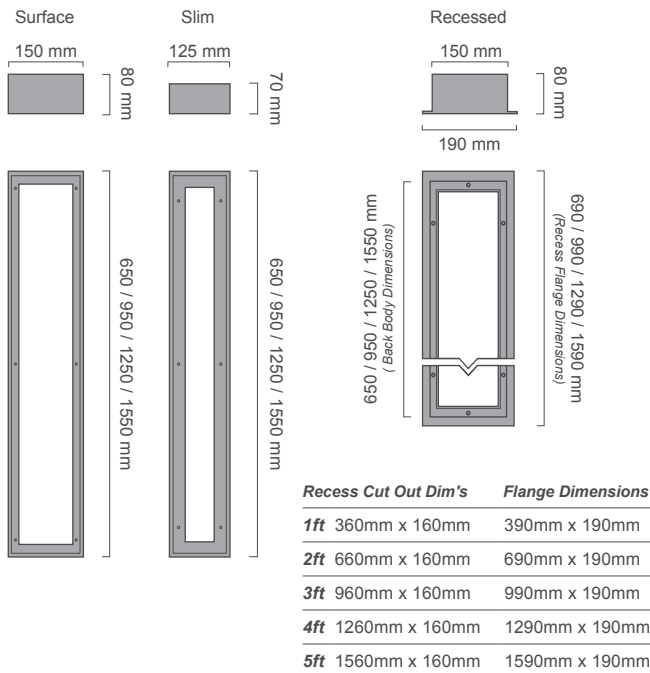

### Standard Fixing Detail

- 4qty x 6mm Ø Back Body Corner Mounting Holes
- 1qty x 20mm Ø Back Body Centre Cable Entry Hole

**5 YEAR WARRANTY**  
(Extended Warranty Options Available On Request)

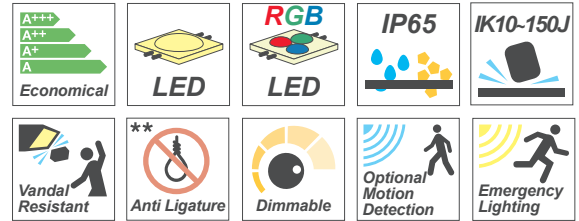

- Anti Ligature Must be correctly installed using 'Anti Pick' Mastic
- Fully Welded Fabricated Galvanised Steel Version
- Regressed Bezel & Captive Polycarbonate Diffuser
- Countersunk Stainless Steel Security Screw Fixing
- Removable LED Gear Tray

### Linear LED Technical Information

Please refer to website for current LED technical specification

Order Code	Length	Lumens	Im/W		Colour Temp	Ra	Weight	
			HE	HO				
STR 1.0	2.0	300	1000lm	2000lm	115	3000K/4000K	>80	4.0
STR 1.3	2.6	600	1300lm	2600lm	115	3000K/4000K	>80	6.0
STR 1.9	3.9	900	1950lm	3900lm	112	3000K/4000K	>80	8.0
STR 2.6	5.2	1200	2600lm	5200lm	110	3000K/4000K	>80	10.0
STR 3.2	6.5	1500	3250lm	6500lm	108	3000K/4000K	>80	12.0

Specific higher/lower lumen packages on request (above are LED comparable to T5 lamp options)

**\*RGB Colour Change LED & \*\*Tuneable White LED options**

### Ordering Options

Description	Suffix Ordering Code
Surface Mounted Body Version	/SM
Recess Mounted Body Version	/RM
Slim Body Version	/SLIM
Exterior Fully Weatherproof Version	/EXT
Metro Bus Shelter Version	/METRO
Dimmable Options (DALI/1-10v/Sw-240v/Corridor)	/DALI / 1-10v / SW-240v / CORR
Integral 3hr Emergency or 3hr Self Test	/EM3 or /EM3-SELF
Microwave Motion Detection	/M-Wave
Night Light	/NL
Frosted Diffuser	/F
Clear Stippled Diffuser	/P
Security Driver/Key	/SD
Stainless Steel Version (316/304/430 Grades)	On Request
LED Linear Tube Gear Tray (240v Mains)	/GT-LEDT5
Fluorescent Lamp Version	/T5 or /T8 On Request