


Our seamless low voltage track system offers residential and hospitality spaces a great lighting opportunity. The slim design and sophisticated magnetic spots and linear lights, which can be placed on any position in the profile, will offer an extra dimension to your project.



Colour ○ ●

- Housing** : Aluminium
- Length track** : 1 meter / 2 meter
- Input voltage** : 24V DC (power supply not included)
- Max. wattage** : 200W (8A max).
- Dimmable** : DALI, 1-10V (via power supply)
- System** : Magnetic
- Application** : Surface mounted / pendant / recessed
- Including** : Connection for 24Vdc and 2 end caps

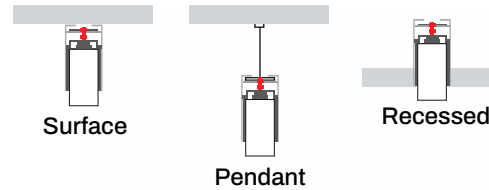


Visit our website to see the full Tendenza program including all available accessories.




Available Fixtures




Veneto12
24Vdc 1150lm 12W
2700K RA90 34°
Dimmable
Low UGR due to
dark-light reflectors

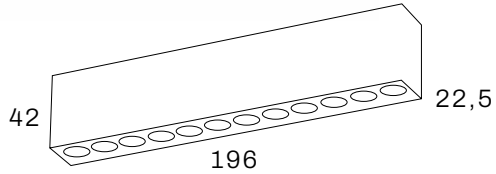


Veneto24
24Vdc 2400lm 24W
2700K RA90 34°
Dimmable
Low UGR due to
dark-light reflectors

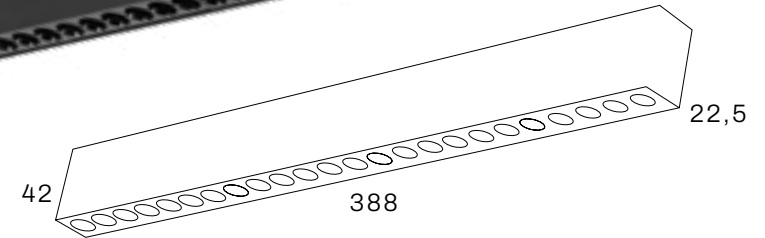


Sorrento40
24Vdc 900lm 15W
2700K RA90
Dimmable
Opal cover

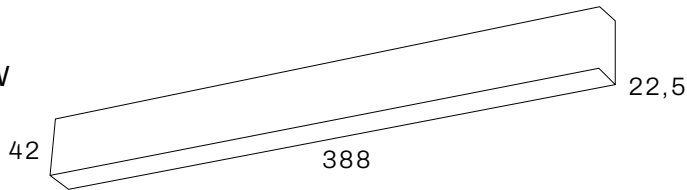


Sorrento80
24Vdc 1800lm 30W
2700K RA90
Dimmable
Opal cover

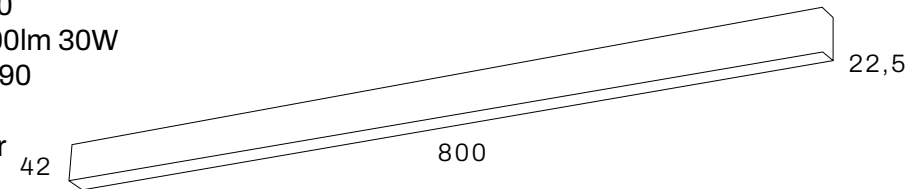


White, black and golden inner ring available for Amalfi35, Amalfi50 and Puglia35.

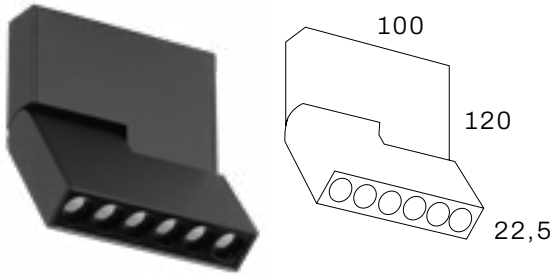


Verona06
24Vdc 650lm 8W
2700K RA90 34°
Dimmable
Low UGR due to dark-light reflectors

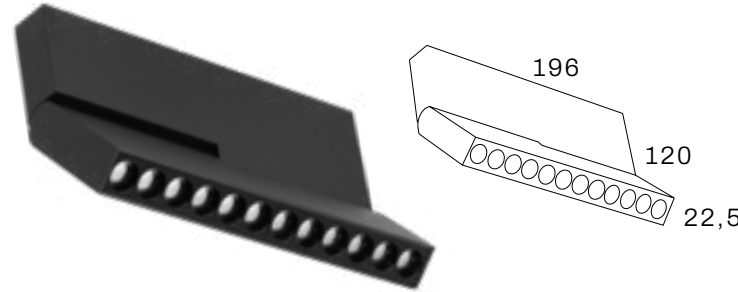


Verona12
24Vdc 1150lm 12W
2700K RA90 34°
Dimmable
Low UGR due to dark-light reflectors

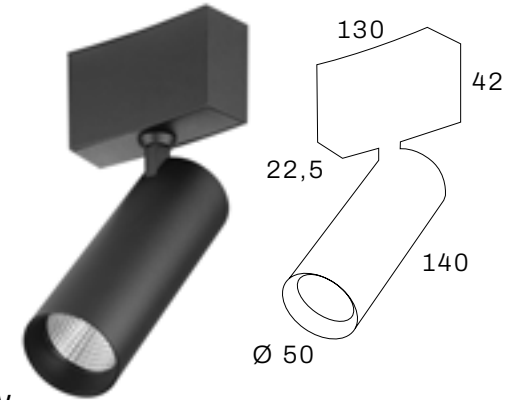


Amalfi50
24Vdc 780lm 10W
2700K RA90 24° or 40°
Dimmable

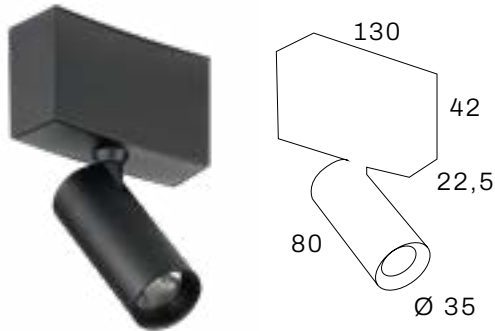

Amalfi35
24Vdc 440lm 5W
2700K RA90 20° or 40°
Dimmable

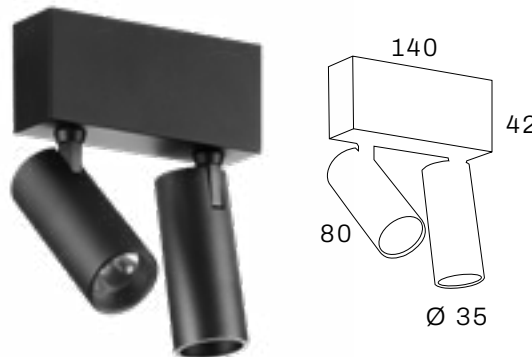


Amalfi35D
24Vdc 2x 440lm 10W
2700K RA90 20° or 40°
Dimmable

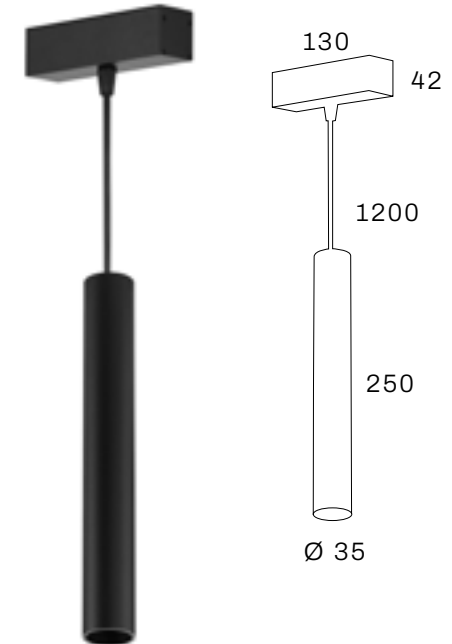


Puglia35
24Vdc 440lm 5W
2700K RA90 60°
Dimmable

24V MAGNETIC TRACK | CURVED

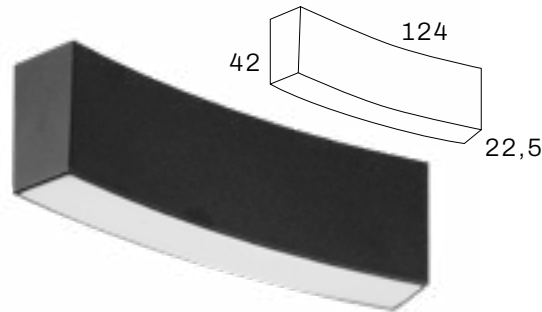

Lazio
24Vdc 450lm 7W
2700K RA90 Opal
Dimmable

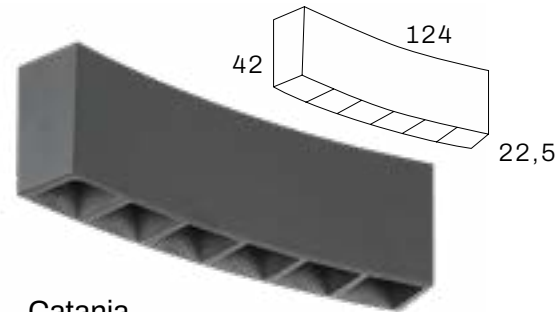


Catania
24Vdc 580lm 8W
2700K RA90 34°
Dimmable
Low UGR due to dark-light reflectors



Our curved fixtures are suitable for the Tendenza 1/4 circle component (4x 1/4 = Ø1000mm).



Firenze35
24Vdc 440lm 5W
2700K RA90 20° or 40°
Dimmable

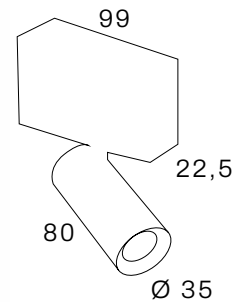

Firenze50
24Vdc 780lm 10W
2700K RA90 24° or 36°
Dimmable

