






**PROFILE RECTANGLE UD**

<b>PRODUCT MATERIAL</b>	Aluminium profile
<b>LIGHT SOURCE</b>	Philips Ledline
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>DRIVER LEDLINE</b>	Including Philips Xitanium driver
<b>COLORS (Δ)</b>	<ul style="list-style-type: none"> <li>○ 3 = RAL 9003 white</li> <li>● 5 = RAL 9005 black</li> <li>● 6 = RAL 9006 alu</li> </ul>
<b>REFLECTOR</b>	Aluminium white
<b>ADJUSTABLE</b>	No
<b>SIZE</b>	See technical drawing

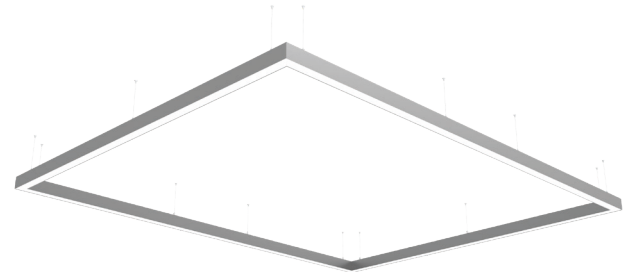

**OPTIONS**

<b>COLORS</b>	Available in all RAL colours on request Additional price + 10%
<b>DIMMABLE</b>	Dali dimmable
<b>DIFFUSER</b>	White opalic diffuser in standard Microprismatic UGR<19 option
<b>EMERGENCY</b>	3 hours
<b>IP CLASS</b>	IP20 in standard, IP44 on request
<b>COLOUR RENDERING INDEX</b>	>80 in standard, other on request
<b>MOVEMENT SENSOR</b>	On request
<b>DAYLIGHT CONTROL SENSOR</b>	On request
<b>TUNABLE WHITE</b>	On request
<b>CYAN ENHANCED STATIC</b>	On request

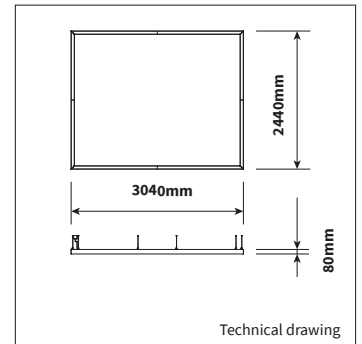


**INFORMATION**

Including 1500mm steel wire suspension with wire length control

**Bespoke size & product features available**

LiteTime reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**DIFFUSER**



ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	NETTO LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME
Δ See colors								
9273.244.30.Δ	2440 X 3040mm	59400lm	41000lm	361W	165lm/W	3000K	>80	50.000 Hrs
9273.244.35.Δ	2440 X 3040mm	59400lm	41000lm	361W	165lm/W	3500K	>80	50.000 Hrs
9273.244.40.Δ	2440 X 3040mm	59400lm	41000lm	361W	165lm/W	4000K	>80	50.000 Hrs