




PROFILE SNAKE

PRODUCT MATERIAL	Aluminium profile
LIGHT SOURCE	Philips Ledline
MODULE LIFETIME	Approx. 50.000 hours
DRIVER	Including on/off driver
COLORS (Δ)	<input type="radio"/> 3 = RAL 9003 white <input checked="" type="radio"/> 5 = RAL 9005 black <input type="radio"/> 6 = RAL 9006 alu
REFLECTOR	Aluminium white
SIZE	See technical drawing

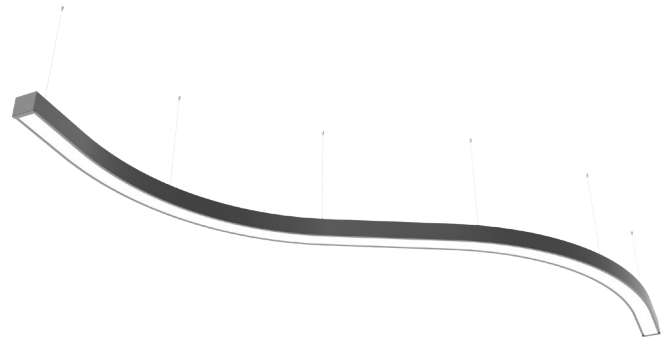

OPTIONS


COLORS	Available in all RAL colours on request Additional price + 10%
DIMMABLE	Dali dimmable
IP CLASS	IP20 in standard, IP44 on request
COLOR RENDERING INDEX	>80 in standard, other on request
MOVEMENT SENSOR	On request
DAYLIGHT CONTROL SENSOR	On request
TUNABLE WHITE	On request
CYAN ENHANCED STATIC	On request

INFORMATION

Including 1500mm steel wire suspension with wire length control

Bespoke size & product features available


LiteTime reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

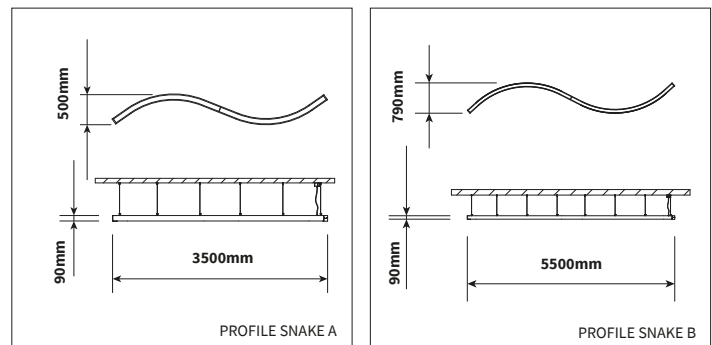

DIFFUSER



White opal

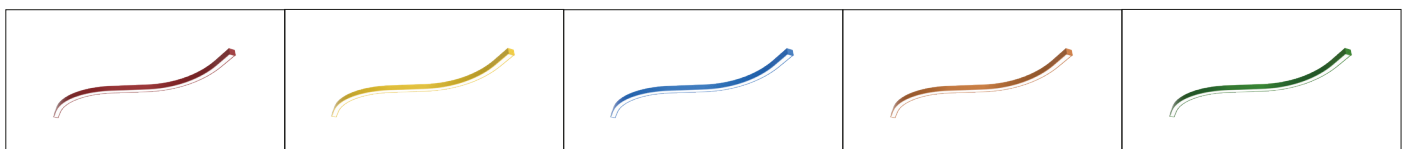

ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	NETTO LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME
PROFILE SNAKE A								
Δ See colors								
9277.350.30.Δ	3500mm	13000lm	9000lm	82W	159lm/W	3000K	>80	50.000 Hrs
9277.350.35.Δ	3500mm	13000lm	9000lm	82W	159lm/W	3500K	>80	50.000 Hrs
9277.350.40.Δ	3500mm	13000lm	9000lm	82W	159lm/W	4000K	>80	50.000 Hrs
PROFILE SNAKE B								
9278.550.30.Δ	5500mm	22000lm	15000lm	133W	165lm/W	3000K	>80	50.000 Hrs
9278.550.35.Δ	5500mm	22000lm	15000lm	133W	165lm/W	3500K	>80	50.000 Hrs
9278.550.40.Δ	5500mm	22000lm	15000lm	133W	165lm/W	4000K	>80	50.000 Hrs