





<b>PRODUCT MATERIAL</b>	Die-cast aluminium
<b>ADAPTER</b>	48V adapter
<b>LIGHT SOURCE</b>	Bridgelux BXR
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>DRIVER</b>	Including Dali driver
<b>COLORS (Δ)</b>	<input type="radio"/> 3 = RAL 9003 white <input checked="" type="radio"/> 5 = RAL 9005 black
<b>BEAM ANGLE</b>	45°
<b>ADJUSTABLE</b>	Yes
<b>SIZE</b>	Ø86 X 1200mm

## OPTIONS

<b>ANTI-GLARE RING</b>	Black anti-glare ring	Included
	Gold anti-glare ring Art. no.: 3067.030.00.9	
<b>WIRELESS DIMMABLE</b>	Zigbee or Casambi	

## INFORMATION

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.

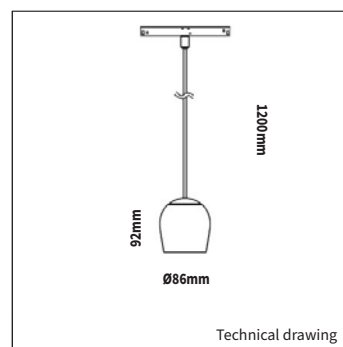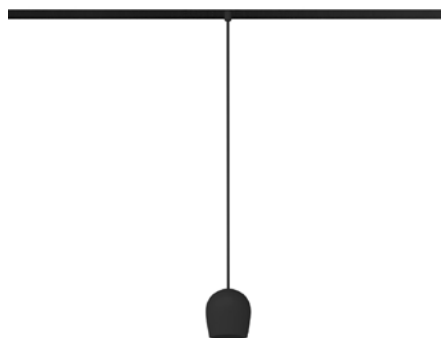

## ANTI-GLARE RING



Black

Gold

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
----------------	-----------	-------	---------------	--------------	-------------------	-------------------	-----	-------------	----

Δ See colors

5816.720.45.Δ	BXR	Bridgelux	800lm	14W	57lm/W	1800-3000K	DTW >90	50.000 Hrs	350mA
---------------	-----	-----------	-------	-----	--------	------------	---------	------------	-------