



LED STREET LIGHT FIXTURE



NIMBUS-8000-W

Body:

Polyester powder painted non-corrosive high-pressure die-cast aluminium

Optic:

W – wide beam optic, for M class roads

EW – extra wide beam – for P and C class roads

S – symetric optic – for parkings and open areas


Glass cover (KC)

Application:

Mounting module is fixed to any post top 60 mm or side entry spigot 60 mm.

Adjusting angle +/-10 dg.

Recommended height of installation 4 -10 m.

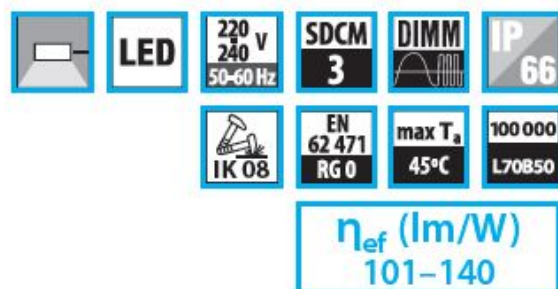


2200	2700	3000	4000	5000	6500	MIX	RGB	
×	○	×	●	×	×	×	×	●
●	×	○	×	×	×	×	×	●

● default


○ optional

×


 not possible




NIMBUS-W



NIMBUS-EW



NIMBUS-S

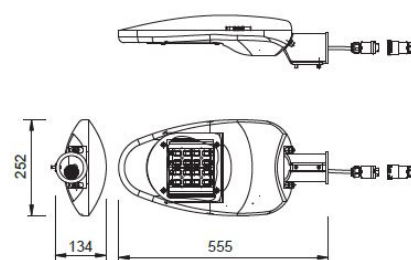

W – wide beam optic, for M class roads

	W	lm		kg
		2700 K	4000 K	
NIMBUS-2000-W	18	2 350	2 500	4
NIMBUS-4000-W	31	3 750	4 000	
NIMBUS-6000-W	50	6 200	6 600	
NIMBUS-8000-W	72	8 000	8 500	

EW – extra wide beam – for P and C class roads

	W	lm		kg
		2700 K	4000 K	
NIMBUS-2000-EW	18	2 430	2 550	4
NIMBUS-4000-EW	31	3 860	4 100	
NIMBUS-6000-EW	50	6 450	6 800	
NIMBUS-8000-EW	72	8 300	8 800	

S – symmetric optic – for parkings and open areas

	W	lm		kg
		2700 K	4000 K	
NIMBUS-2000-S	18	2 330	2 450	4
NIMBUS-4000-S	31	3 720	3 900	
NIMBUS-6000-S	50	6 250	6 600	
NIMBUS-8000-S	72	7 900	8 350	

lm - luminaire light output

CODE: NIM4000KC4W/ND

NIM	4000	KC	4	W	/ND
Luminaire type	Luminaire light output lm	Cover KC – glass cover	Color temperature: 2 = 2700K 4 = 4000K	Optic: W – wide beam EW – extra wide beam S – symmetric	Driver type: ND – fix output REG – controllable