



Housing	Aluminium, die cast
RAL colour	9004 (Black), 9003 (White), 1036 (Gold)
Fixture type	3-phase track light
Module	Bridgelux V6 LED
Driver	TRIAC dimmable driver
Lumen output	500lm, 700lm
CCT	2700K, DTW (3000K – 2000K)
CRI	>90Ra
Beam angles	15°, 24°, 40°
Adapter	Powergear® 3-phase adapter included
Rotatable	350°
Tiltable	90°
Expected Lifetime	50.000h L80/B10
Photobiological safety	RG1 unlimited
Power factor	> 0.9
UGR	< 19
Colour consistency	3 SDCM
Warranty	3 years warranty on LED module and driver



LED MODULES



OPTIONS



ANTI-GLARE RINGS



LED MODULE OPTIONS

[illegible]

LED modules

Standard: CRI>80 and >90 in CCT 2700K, 3000K, 3500K, 4000K

Premium White (PW): for fresh white and depth of colour in retail environments

¹⁾ Lumen output of LED module (COB)

²⁾ Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT.


The power of the complete fixture will be slightly higher due to the power consumption of the driver.

³⁾ Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour temperature is subject to a tolerance of up to +/- 150 Kelvin compared to the nominal value.

Technical data can be changed by Internova without prior notice.


POLAR DIAGRAMS

15°

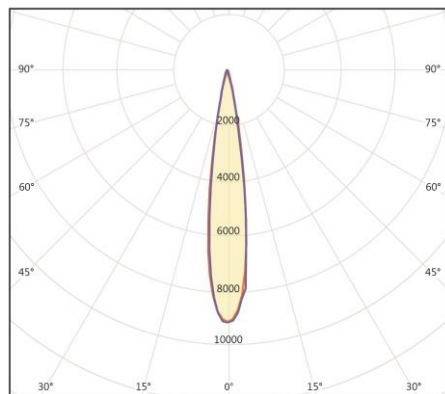


cd/klm $\eta = 92\%$
— c0/c180
— c90/c270

24°

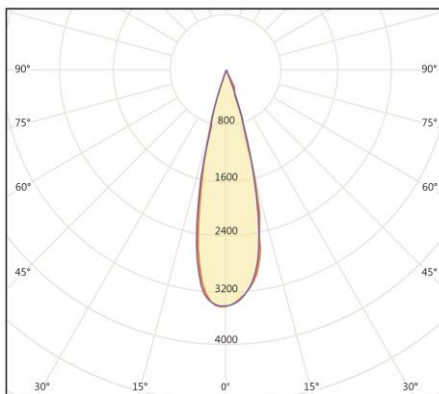

cd/klm $\eta = 92\%$
— c0/c180
— c90/c270


40°

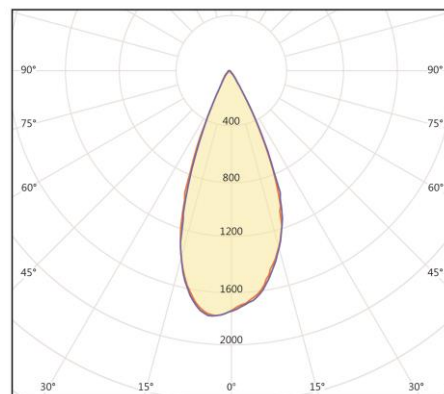

cd/klm $\eta = 92\%$
— c0/c180
— c90/c270

DIMENSIONS

Net Weight	Dimensions carton L x W x H	Qty outer carton
256 grams	8 x 7 x 24 cm	24



ARTICLE CODE STRUCTURE

