



Body:

White painted (RAL 9003) zinc metal sheet

Optic:

KN - microprismatic diffusor

KO - opal cover

Application:


Flat surface lighting fitting.

Versions:

SS - square

RM - rectangle, medium

RL - rectangle, large

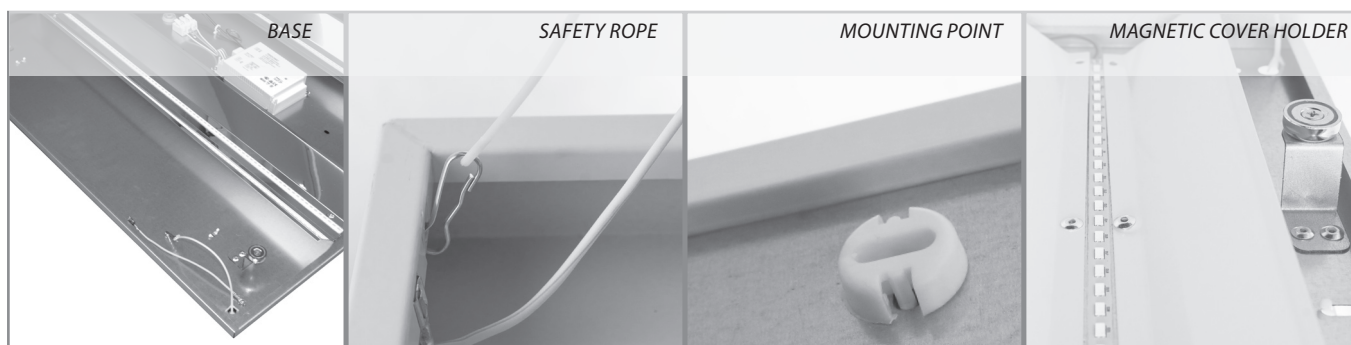

2200	2700	3000	4000	5700	6500	MIX	RGB	⚡
×	○	○	●	○	○	×	×	×
ON OFF	1-10V	DALI	Bluetooth	DMX	Beam	INT	EXT	⚡
●	○	○	×	×	×	○	×	×


● default

○ optional


×

 not possible


G	W	lm		A	B	C	X	Y	kg					
		KO	KN											
G2SS/700	33	3 900	4 100	650	650	40	400	470	4,5					
G2SS/1050	50	5 400	5 700				800	150	3,7					
G1RM/700	33	3 900	4 200	1 230	220									
G1RM/1050	52	5 700	6 000		1 100		4,5							
G1RL/1050	39	4 650	4 900	1 535										
G1RL/1400	48	5 700	6 000											



G KN



G KO

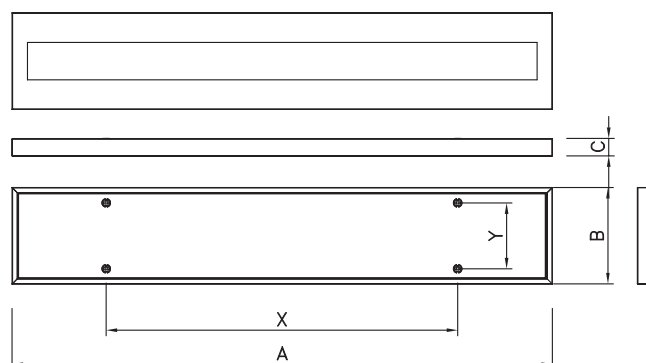

Codes: G1RMKN3V1/700ND

G	1	R	M	KN	3	V1	/ 700ND
Luminaire type							
Nr of ligh strips							
Body shape: S - square R - rectangle							
Body length: S = 600 mm M = 1200 mm L = 1500 mm							
Cover type: KN – microprismatic cover KO – opal cover							
Color temperature: 3 = 3000K 4 = 4000K							
Used LEDs							
Driver type: 700mA, 1050mA, 1400mA ND – no dimmable DIM – dimmable 1-10V DALI – dimmable DALI							

