




EPK RM

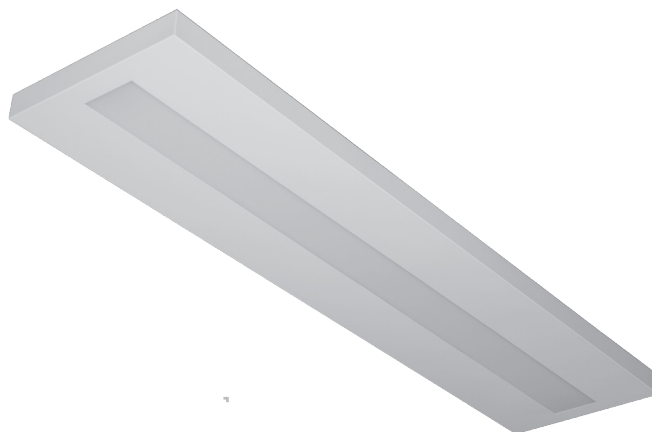

EPK SS/2

Body:

White painted (RAL 9003) metal sheet

Optic:

KO - opal PS cover

KN - microprismatic PS cover

Application:

Surface installation using magnetic holders (part of the package)

Pendant installation using suspension set (extra accessories)


ZH/UNI2 - fittings EPK RS

ZH/UNI4 - fittings EPK SS

Accessories:

ZH/UNI2 – universal 2-wires suspension


ZH/UNI4 – universal 4-wires suspension



MAGNETIC HOLDER



ZH/UNI2



OPAL COVER



DRIVER


2200	2700	3000	4000	5700	6500	MIX	RGB	
✗	○	○	●	○	○	○	✗	●
●	○	○	○	○	○	○	✗	✗

● default


○ optional

✗ not possible


EPK	W	Im		A	B	C	X	Y	kg
		KO	KN						
EPK2000 RS /1/	15	1 850	1 950	655	295	40	500	-	1,0
EPK2000 SS /1/	15	1 850	1 950	595	595			500	2,0
EPK3000 SS /1/	20	2 500	2 650						
EPK3000 SS /2/	19	2 650	2 800						
EPK4000 SS /2/	30	3 900	4 100						
EPK6000 SS /2/	48	5 700	6 000						
EPK4000 RM /1/	28	4 000	4 200	1 230	295		1 140	-	2,9
EPK6000 RM /1/	51	5 600	5 900						
EPK4000 RL /1/	34	4 200	4 400	1 535			1 300		
EPK6000 RL /1/	46	5 500	5 800						




EPK KO



EPK KN

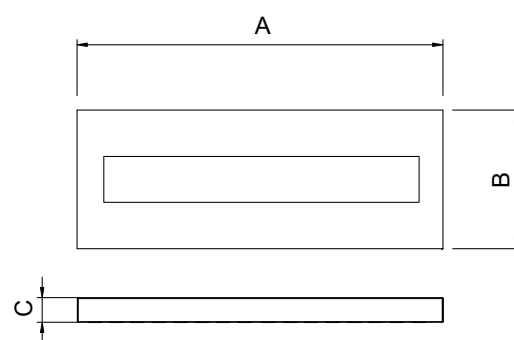

EPK RS



EPK SS/1



EPK RM/1

Codes: EPK4000RS3KN/1/ND

EPK	4000	R	S	3	KN	/1	/ND
Luminaire type							
Light output							
body shape: R – rectangle S – square							
body length: S = cca 600 mm M = cca 1200 mm L = cca 1500 mm							
Color temperature 2=2700, 3=3000K, 4=4000K, 5=5700K							
Optic: KO - opal PS cover KN - microprismatic PS cover							
Nr of LED modules							
Driver type: ND – no dimmable DALI – dimmable DALI							

