




Led track fixture developed for use in applications with high installation heights and characterised by a high luminous flux. Created to meet the lighting requirements of commercial areas, sales areas, commercial galleries, common areas. It is compact and easy to assemble, flexible

Colour

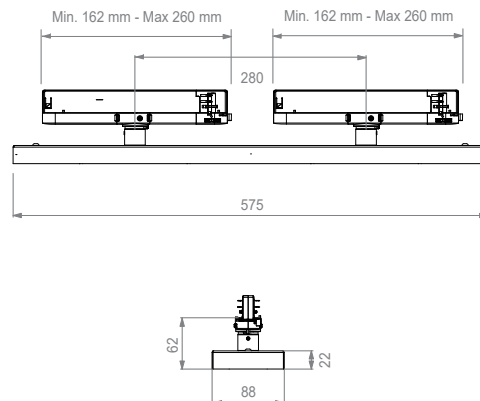

**TRACK** 1,7 Kg **DRIVER INCLUDED** 220-240V 50/60 Hz **IP 20** **CE**

## TECHNICAL FEATURES

**CORPO**  
Sheet steel

**COOLING**  
Passive heat dissipation

**POWER**  
47 W Led - 54 W System  
61 W Led - 70 W System  
The data relating to wattages is provided as a guideline and is subject to change

**OPTICAL SYSTEM**  
PMMA lens

**LIFE TIME** (TA = 25°C)  
Lumen maintenance: L80B50 > 100.000 h - L80B10 > 60.000

**COLOUR RENDERING**  
CRI>80 (3000 K - 4000 K)

CODE	LENS	LED TECHNICAL DATA	COLOUR	ACCESSORIES
BMQ	30 30°	HE0W 47 W 7670 lm 3000 K	B WHITE	0
	60 60°	HE0C 47 W 8090 lm 4000 K	N BLACK	
	90 90°	H00W 61 W 10390 lm 3000 K	G GREY	
	AL Asymmetrical left	H00C 61 W 10630 lm 4000 K		
	AR Asymmetrical right			
	BW Batwing			

Coding example

BMQ30HE0WB0

BMQ CODE + 30 LENS + HE0W LED TECHNICAL DATA + B COLOUR + 0 ACCESSORIES

AVAILABLE ON REQUEST

**RAL** DALI 5000K