




PRODUCT MATERIAL	Die-cast aluminium
ADAPTER	3-phase track adapter driver
LIGHT SOURCE	Philips SLM G7
MODULE LIFETIME	Approx. 50.000 hours
DRIVER	Including Xitanium on/off driver
COLORS (Δ)	○ 3 = RAL 9003 white ● 5 = RAL 9005 black
BEAM ANGLE	▲ 24°
ADJUSTABLE	Horizontally and vertically rotational
SIZE	Ø90 X114mm



OPTIONS

OPTIONAL BEAM ANGLE	▲ 15°	Art. no.: 3068.010.15.0
	▲ 36°	Art. no.: 3068.010.36.0
	▲ 45°	Art. no.: 3068.010.45.0
	▲ 60°	Art. no.: 3068.010.60.0
ANTI-GLARE RING	Black	Included
	Gold	Art. no.: 3068.030.00.9
HONEYCOMB	Art. no.: 3068.040.00.0	
DIMMABLE	DALI	On request
WIRELESS DIMMABLE	Masterconnect, Easy Air/Zigbee	

Design Patent Certificate
No: ZL 2019 3 0427886.1 Trackspot Venus Patent

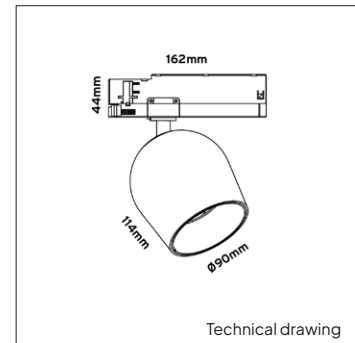

INFORMATION

Nominal lifetime L90/B50 @50.000 h / 25°C

This luminaire is also available in T100lm SLM on request

⚠ The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.



ANTI-GLARE RING



HONEYCOMB



AVAILABLE SLM OPTIONS To order the correct product, please replace **COB*** in the article number field with the COB code see last page of the catalogue

ARTICLE NUMBER	LUMINOUS FLUX	BRAND	COLOR TEMPERATURE	SETTING
3068. COB* .24.Δ	2000lm	Philips SLM G7	927 / 830 / 930 / 835 / 840 / 850	High Efficiency
3068. COB* .24.Δ	2000lm	Philips SLM G7	Premium White 830 / 930 / 935 / 940	High Efficiency
3068. COB* .24.Δ	2000lm	Philips SLM G7	Premium White HE 930	High Efficiency
3068. COB* .24.Δ	2000lm	Philips SLM G7	Premium Color 930	High Efficiency
3068. COB* .24.Δ	2000lm	Philips SLM G7	Food: Bakery / Iced Seafood / Live Seafood	High Efficiency
3068. COB* .24.Δ	3000lm	Philips SLM G7	827 / 927 / 830 / 930 / 835 / 840 / 850 / 857	High Efficiency
3068. COB* .24.Δ	3000lm	Philips SLM G7	Premium White 830 / 930 / 935 / 940	High Efficiency
3068. COB* .24.Δ	3000lm	Philips SLM G7	Premium White HE 930	High Efficiency

⚠ High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB LED specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

LiteTime reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.