

CR4000..A..



CR10000..D..

## LED fittings for cleanrooms

### Body:

White painted (antibacterial paint RAL 9003) metal sheet

### Optic::

KVM – clear glass + double parabolic louvre category C2 of mat aluminium

### Application

- Recessed installation into false ceiling with visible supporting structure (both 600x600 or 625x625 modules)

Luminaires are installed without opening them, the connection to the mains is provided via external connectors in the luminaire body

The fixture can not be open - emergency module not available.

These LED fittings are recommended for laboratories and medical facilities with high demands on cleanliness

### Variants:


600 – for 600 module

625 – for 625 module


C - complete antibacterial protection of the luminaire surface D - without antibacterial protection

### Accessories:

QVESTRAM - a frame for recessed installation into gypsum plasterboard ceiling

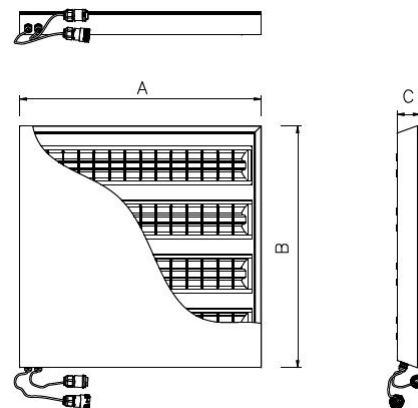

	W	lm	Modul 600		Modul 625		C	kg
			A	B	A	B		
CR5000A	43	5 000	596	596	622	622	57	8,7
CR5000C	43	5 000	1196	296	1245	310		8,6
CR10000D	100	11 000	1196	596	1245	622		16,5
CR5000A.../90	43	4 300	596	596	622	622		8,7
CR5000C.../90	43	4 300	1196	296	1245	310		8,6
CR10000D.../90	100	9 400	1196	596	1245	622		16,5

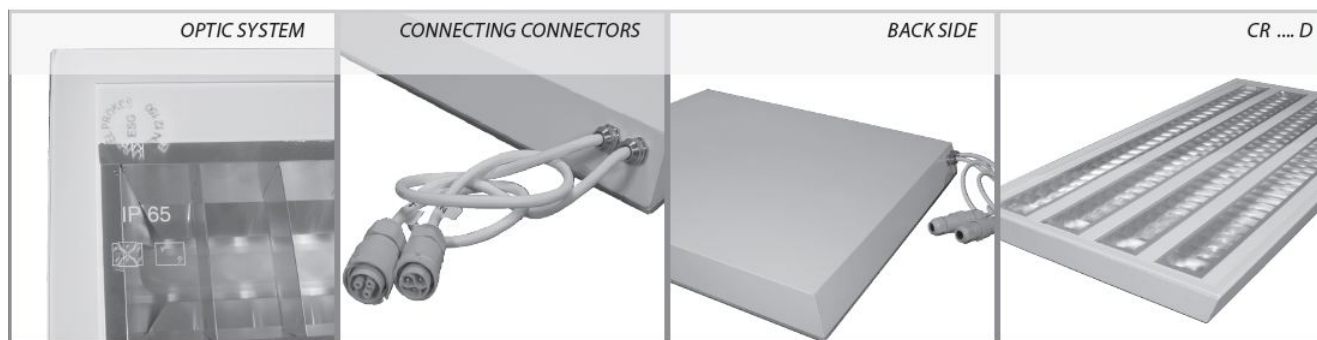


2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	○	○	○	×	×
●	×	○	×	○	×	×	×	○

● default

○ optional

×



CR 5000 A



Code: CR5000A4KVM4C600ND

CR	5000	A	4	KV	4	C	600	ND	/90
Luminaire type									
Light output (lm)									
Body shape									
A - square - 600x600 mm									
C - rectangle - 1200x300 mm									
D - rectangle - 1200x600 mm									
Color temperature									
2 = 2700 K									
3 = 3000 K									
4 = 4000 K									
5 = 5700 K									
6 = 6500 K									
Optic type:									
KV - opal profile + louvre ALDP									
KVM - opal profile + louvre MAT									
Nr of LED modules									
Cover:									
C - clear glass, complete antibacterial protection of the luminaire surface									
D - clear glass, without antibacterial protection of the luminaire surface									
Modul									
600, 625									
Driver type:									
ND - no dimmable									
DALI - dimmable DALI									
/90 - CRI90									