


Reflector				Led module					
Reflector	Reflector	Reflector	Reflector	Standard	Premium	CRI 98	HE+	Food	DTW
									
Mounting		Dim options			Fixture options				
TW	3-phase	Dimmable	Dimmable	Dimmable	Casambi	Glass	Honeycomb		
									
Lumen output				1100lm • 2000lm • 3000lm • 4500lm • 5500lm					
CRI				>80Ra • >90Ra					
CCT				2700K • 3000K • 3500K • 4000K • 5700K					

FIXTURE SPECIFICATIONS



Fixture weight: 950 grams

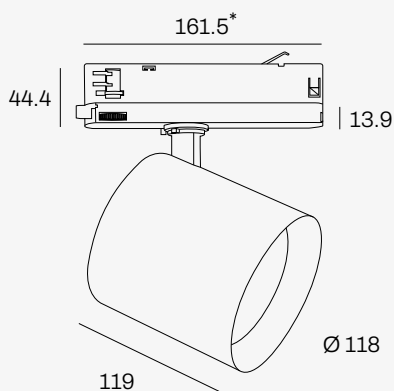

Housing material	Die cast aluminium
Material finish	Powder coating
RAL colour	9004 (Black) • 9003 (White) • 9006 (Grey)
Fixture type	3-phase track light
LED Module	Philips Fortimo SLM LED
Driver	Philips Xitanium in-track adapter
Number of light sources	1
Adjustability	350° rotatable and 90° tiltable
IP rating	IP20
Expected lifetime	L90 / B10 @ 66.000 hours
Photobiological safety	RG1 Unlimited
Power factor	> 0.9
Colour consistency	3 SDCM
Warranty	5 years on LED module and driver

* Length of in-track adapter may vary depending on selected dimming options

FIXTURE VARIATIONS

LED module	Lumen	Light colour	Efficiency (Lm/W)	Power	Dim options
Philips Fortimo SLM G7	1100lm	827 / 830 / 840	135 / 141 / 146	7.5W	Triac / DALI / Casambi
Philips Fortimo SLM G7	1100lm	857	147	7.4W	Triac / DALI / Casambi
Philips Fortimo SLM G7	1100lm	927 / 930 / 930PW / 935PW / 940PW	111 / 115 / 115 / 121 / 124	9.4W	Triac / DALI / Casambi
Bakery	1100lm	2500K BA	122	9.5W	Triac / DALI / Casambi
Meat Premium Red	1100lm	MPR	68	17.0W	Triac / DALI / Casambi
Fresh Fish	1100lm	940 FF	107	10.0W	Triac / DALI / Casambi
Dim-to-warm	1100lm	1800K - 3000K	83	14.0W	Triac / DALI / Casambi
Tunable white	1100lm	2700K - 6500K	80	14.5W	DALI
Philips Fortimo SLM G7	2000lm	827 / 830 / 840	124 / 129 / 134	15.6W	Triac / DALI / Casambi
Philips Fortimo SLM G7	2000lm	857	142	15.1W	Triac / DALI / Casambi
Philips Fortimo SLM G7	2000lm	927 / 930 / 930PW	99 / 102 / 102	19.9W	Triac / DALI / Casambi
Philips Fortimo SLM G7	2000lm	935PW / 940PW	110 / 113	17.7W	Triac / DALI / Casambi
Bakery	2000lm	2500K BA	118	17.5W	Triac / DALI / Casambi
Meat Premium Red	2000lm	MPR	68	30.0W	Triac / DALI / Casambi
Fresh Fish	2000lm	940 FF	104	20.0W	Triac / DALI / Casambi
Dim-to-warm	2000lm	1800K - 3000K	83	23.5W	Triac / DALI / Casambi
Tunable white	2000lm	2700K - 6500K	80	25.5W	DALI
Philips Fortimo SLM G7	3000lm	827 / 830 / 840 / 857	125 / 130 / 135 / 135	23.2W	Triac / DALI / Casambi
Philips Fortimo SLM G7	3000lm	927 / 930 / 930PW	99 / 102 / 102	29.7W	Triac / DALI / Casambi
Philips Fortimo SLM G7	3000lm	935PW / 940PW	109 / 112	27.5W	Triac / DALI / Casambi
Dim-to-warm	3000lm	1800K - 3000K	86	35W	Triac / DALI / Casambi
Tunable white	3000lm	2700K - 6500K	82	37.5W	DALI
Philips Fortimo SLM G7	4500lm	827 / 830	126 / 129	35.2W	DALI / Casambi
Philips Fortimo SLM G7	4500lm	840 / 857	138 / 137	33.1W	DALI / Casambi
Philips Fortimo SLM G7	4500lm	927	99	46W	DALI / Casambi
Philips Fortimo SLM G7	4500lm	930 / 930PW	106 / 106	41.6W	DALI / Casambi
Philips Fortimo SLM G7	4500lm	935PW / 940PW	112 / 115	39.4W	DALI / Casambi
Philips Fortimo SLM G7	5500lm	827 / 830	126 / 129	42.3W	DALI / Casambi
Philips Fortimo SLM G7	5500lm	840 / 857	138 / 137	40.3W	DALI / Casambi

Fixture variations:

¹⁾ Lumen output of LED module (COB) is displayed as net lumen and is subject to 10% tolerance of real time light output (set by international standards)

²⁾ Colour temperature notation is composed of CRI value, indicated by the first digit, and CCT in Kelvin, indicated by the following 2 digits. Accuracy of the Correlated Colour Temperature (CCT) is subject to a tolerance of up to +/- 150 Kelvin compared to nominal value.

³⁾ Fixture efficiency is displayed in lumens per watt and is calculated based on the net lumen output and power consumption of both the LED module and driver.

⁴⁾ Mentioned wattage applies for the total power consumption of the fixture, including both LED module and driver.

Technical data can be changed by Internova Professional Lighting BV without prior notice.

ARTICLE CODE CONFIGURATOR

IN

LUMEN OUTPUT

LIGHT COLOUR


REFLECTOR

FIXTURE COLOUR

DIM OPTIONS


OPTIONS

POLAR DIAGRAMS

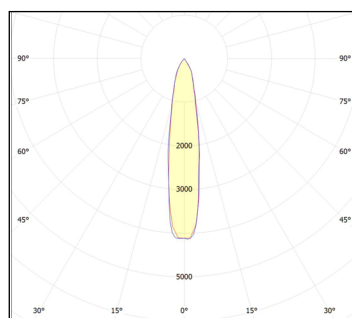


cd/klm
c0/c180
c90/270

n= 92%
15 degrees

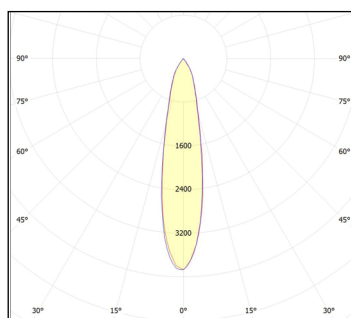


cd/klm
c0/c180
c90/270

n= 92%
24 degrees



cd/klm
c0/c180
c90/270

n= 92%
40 degrees

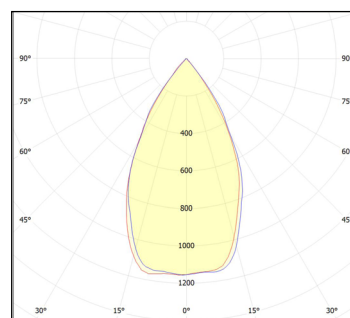

cd/klm
c0/c180
c90/270

n= 92%
60 degrees