



Free-standing LED fitting

Body:

aluminium profile, steel base finished in grey RAL9006, also available in white or black on request

Optic:

Microprismatic / Opal cover

Direct / indirect light distribution

Application:

Free-standing luminaires can be positioned in any location in the room, at any position relative to the task area



Luminaire height 2m

Functions:

Touch dim + Proportional switch - to change a ratio of direct and indirect light

Indirect/direct light can be switched/dimmed separately

FSQ.../SC -fitting with integrated light sensor

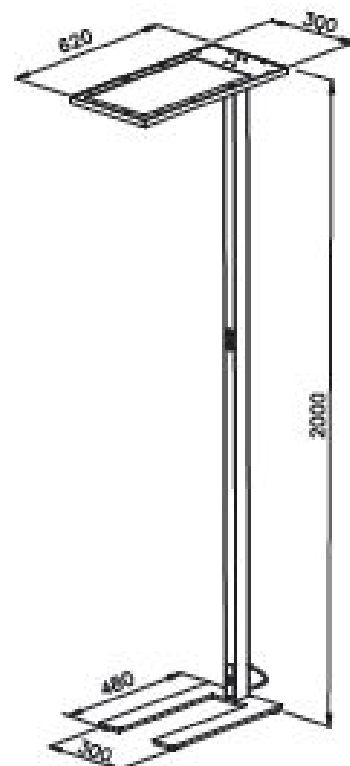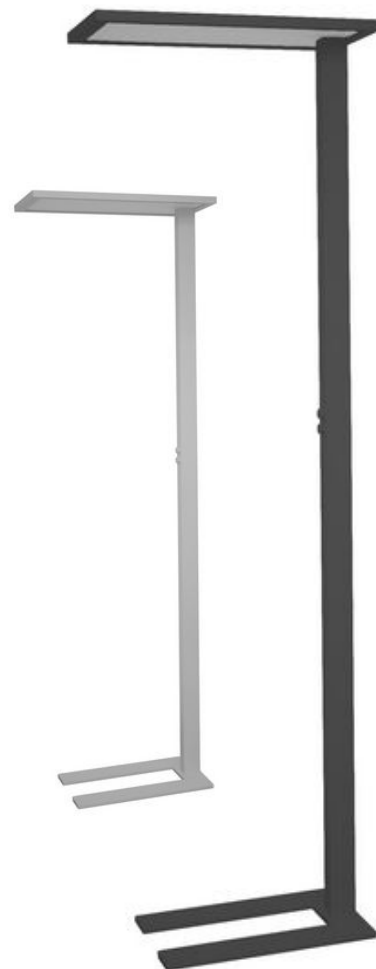

	LED	220 V 240 V 50-60 Hz	SDCM 3	DIMM 	IP 20	CRI 80	EEC A+
EN 62 471 RG 0	80 000 L80B50						

2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	○	×	○	×	×
ON OFF	1-10V	DALI	Bluetooth			INT	EXT	
×	×	●	○	×	○	×	×	●

● default

○ optional

×

	W	lm	kg
FSQ6000RS4KNDI/TD	52	5 800	10
FSQ8000RS4KNDI/TD	80	8 500	10

lm - luminaire light output

THE MANUFACTURER CONTINUES TO DEVELOP PRODUCTS THROUGHOUT THEIR LIFETIME. THEREFORE, THE COMPANY RESERVES THE RIGHT TO MODIFY MATERIALS, COMPONENTS, AND TECHNICAL PARAMETERS WITHOUT NOTICE. LUMINOUS OUTPUT AND ELECTRICAL LOAD HAVE AN INITIAL TOLERANCE OF +/- 10 % FROM NOMINAL. FAILURE OF ONE LED LIGHT POINT WITHIN A LUMINAIRE DOES NOT IMPAIR FUNCTIONAL PERFORMANCE AND SO IS NOT CLASSIFIED AS REASON FOR COMPLAINT.



FSQ FLOOR MIX


Luminaire for continuous color temperature change, personal detection and lighting level control.

Adjust the color temperature using the mobile app. Range from 2700 - 6500 K.
(BT driver)

Adjustment of lighting level in dependence on daylight intensity.
(DALI LS / PD LI sensor)

Detection of presence of persons
(DALI LS / PD LI sensor)

Possibility to set luminaire properties (color temperature, on / off, lighting level control) also with buttons.

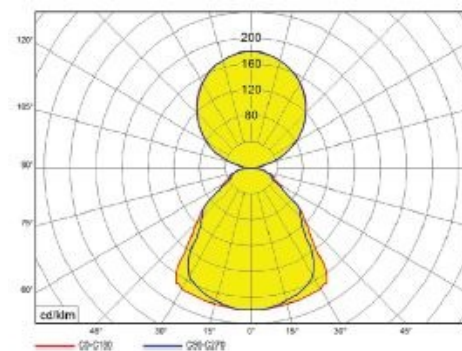

FSQ FLOOR



FSQ FLOOR SB

Luminaire with constant color temperature 4000K and with lighting level control.

It responds to daylight levels and regulates lighting to ensure mental well-being throughout the day.
DALI TRIDONIC - MSensor 5DPI 15.

Control also by remote control (switching on and off the luminaire and adjusting the intensity of light).

