


Colours	■ ■ ■
Housing	Aluminium
Fixture type	Track light
Module	Osram LED module inside
Driver	Driver on board COB
Light Output module	1500lm
CCT	3000K
CRI	>80Ra
Beam angles	37°
Adapter	Powergear® 3-phase adapter included
Rotatable	350°
Tiltable	90°
LED modules	Standard
Dimming Options	N/A
Options	N/A
Expected Lifetime	35.000h (L70/B30)
Photobiological safety	RG1 unlimited
Power factor	> 0.9
Colour consistency.	3 SDCM
Warranty	3 years warranty



Net Weight	Dimensions carton L x W x H	Qty outer carton
505 grams	25 x 12 x 10 cm	18

## Available LED Modules

Description	Lumen	Watt	Lm/W	CCT	CRI
Osram LED module	1500lm	15W	100	830	>80

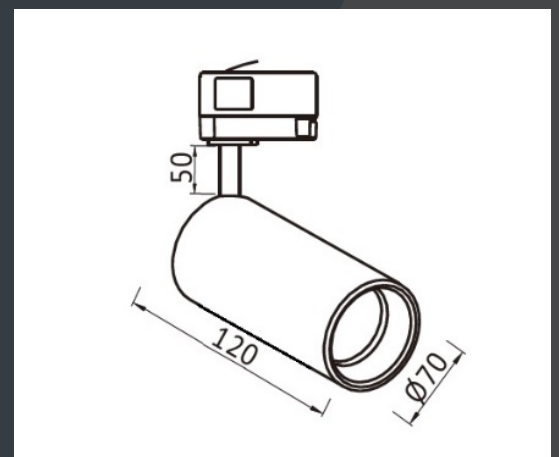

LED modules:

<sup>1)</sup> Lumen output of LED module (COB)

<sup>2)</sup> Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT.

The power of the complete fixture will be slightly higher due to the power consumption of the driver.

<sup>3)</sup> Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour temperature is subject to a tolerance of up to +/- 150 Kelvin compared to the nominal value.

Technical data can be changed by Internova without prior notice.