



<b>PRODUCT MATERIAL</b>	Die-casting aluminium
<b>LIGHT SOURCE</b>	Lumileds 3030
<b>MODULE LIFETIME</b>	Approx. 35.000 hours
<b>DRIVER</b>	Including mean well driver
<b>COLORS</b>	● 7 = RAL 9007 dark grey
<b>BEAM ANGLE</b>	▲ 120°
<b>SIZE</b>	149,8 X 241,7mm



## INFORMATION

<b>WARRANTY</b>	3 years
-----------------	---------


IK10 strong protection

Operation temperature: -20 ~ -50°C

Including daylight sensor: Turn on light level 50 Lux  
Turn off light level > 150 Lux

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources.

RIBBLE

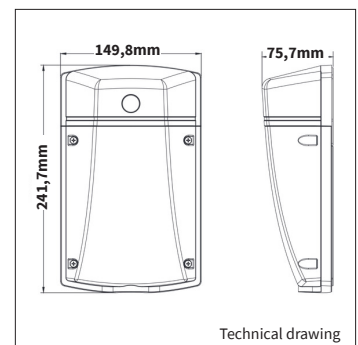

ART.NR.	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME
8251.020.00.7	3030	Lumileds	2100lm	20W	105lm/W	4000K	>80	35.000 Hrs
8251.030.00.7	3030	Lumileds	3150lm	30W	105lm/W	4000K	>80	35.000 Hrs