



PINO CLICK 3

PRODUCT MATERIAL	Die-cast aluminium
LIGHT SOURCE	Bridgelux V8 array
MODULE LIFETIME	Approx. 35.000 hours
DRIVER	Including Phase cut dimmable driver
COLORS (Δ)	○ 3 = RAL 9003 white ● 5 = RAL 9005 black
BEAM ANGLE	23°
ADJUSTABLE	Yes - 0-60° - 360°
SIZE	See technical drawing



OPTIONS

OPTIONAL BEAM ANGLE	36° Art. no.: 3 X 4912.010.36.0
ANTI-GLARE RING	Black anti-glare ring White anti-glare ring Art. no.: 3 X 4912.922.99.3 Gold anti-glare ring Art. no.: 3 X 4912.922.99.9
GLASS	Prismatic Art. no.: 3 X 4912.933.94.0 Frosted Art. no.: 3 X 4912.933.90.0 Striped Art. no.: 3 X 4912.933.96.0
HONEYCOMB	Art. no.: 3 X 4912.933.91.0

OPTION DRIVERS	1/10V	500mA 8-29W Art. no.: 0129.500.30.0
	DALI	500mA 15-35W Art. no.: 0135.500.40.0


INFORMATION

WARRANTY	3 Years
-----------------	---------

Also available in 2 light square canopy and 1 light round canopy version

LiteTime International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources.

PINO CLICK 3

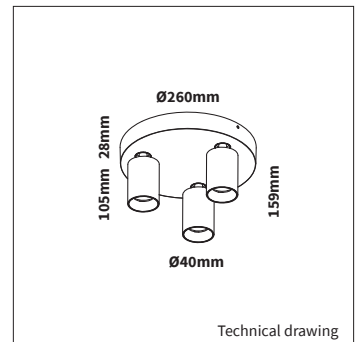

Anti-glare ring



Striped

Frosted

Prismatic



Honeycomb

ART.NR.	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME	mA
Δ see colors									
5032.003.23.Δ	V8	Bridgelux	3 X 845m	3 X 9,2W	91lm	2700K	>90	35.000 Hrs	500mA