



METEOR 20

| | |
|-------------------------|------------------------------|
| PRODUCT MATERIAL | Aluminium and poly-carbonate |
| LIGHT SOURCE | SMD LED |
| MODULE LIFETIME | Approx. 40.000 hours |
| DRIVER | Including driver |
| COLORS | ○ 3 = RAL 9003 white |
| BEAM ANGLE | ▲ 120° Wide beam |
| REFLECTOR PLATE | Opal poly-carbonate diffuser |
| ADJUSTABLE | No |
| SIZE | 200 X 48mm |




INFORMATION

| | |
|-----------------|---------|
| WARRANTY | 3 Years |
|-----------------|---------|

IP 54: For indoor use only

LiteTime International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

METEOR 20

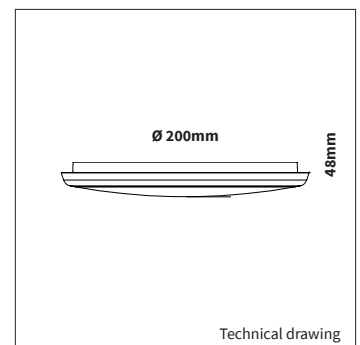

| ART.NR. | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOUR TEMPERATURE | CRI | TC LIFETIME |
|---------------|-----------|---------|---------------|--------------|-------------------|--------------------|-----|-------------|
| 5141.200.12.3 | SMD LED | Epistar | 1120lm | 12W | 94lm/W | 3000K | >80 | 40.000 Hrs |