



PRODUCT MATERIAL	Die-cast aluminium
LIGHT SOURCE	Bridgelux V8 array
DRIVER	Including phase cut dimmable driver
COLORS (Δ)	○ 3 = RAL 9003 white ● 5 = RAL 9005 black
BEAM ANGLE	24°
ADJUSTABLE	350°
DIMMABLE	Yes
SIZE	102 X 84mm

OPTIONS

OPTIONAL BEAM ANGLE	12° Art. no.: 5050.020.12.9
OPTION DRIVERS	1/10V
	DALI

INFORMATION


WARRANTY	3 Years
-----------------	---------

This luminaire is equipped with an innovative lens technology instead of a reflector
High quality LED lens technology + 10% more light output

LiteTime International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.



LUNA

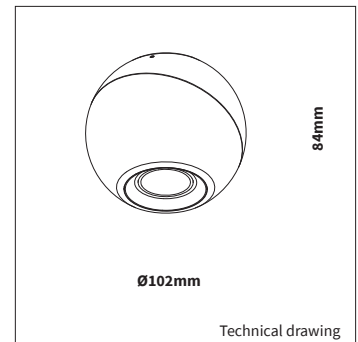

ART.NR.	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME	mA
Δ see colors									
5050.500.24.Δ	V8 Array	Bridgelux	1129lm	8,9W	127lm/W	2700K	>90	50.000 Hrs	500mA