



## Linear & Trunking

Standard

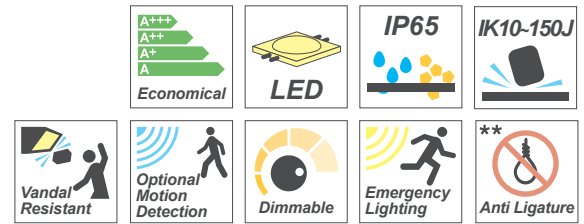

- Anti Ligature Must be correctly installed using 'Anti Pick' Mastic
- Fully Welded Fabricated Steel & Galvanised Bodies
- Regressed Gasketed Bezel
- Captive Polycarbonate Diffuser
- Countersunk Stainless Steel Security Screw Fixing
- Removable LED Gear Tray

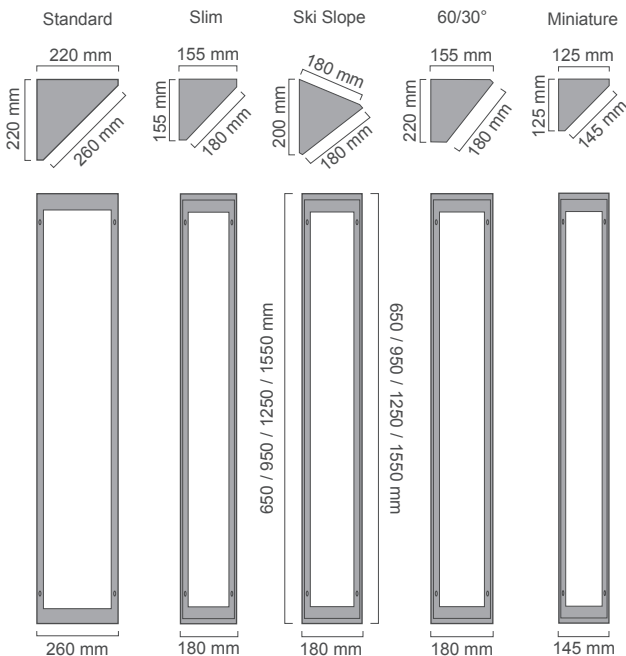

### Standard Fixing Detail

- 4qty x 6mm Ø Back Body Corner Mounting Holes
- 1qty x 20mm Ø Back Body Centre Cable Entry Hole

### Linear LED Technical Information

Please refer to website for current LED technical specification

Order Code	Length	Lumens	Im/W		Colour Temp	Ra	Weight	
			HE	HO				
<b>WFD 1.3</b>	2.6	600	1300lm	2600lm	115	3000K/4000K	>80	6.0
<b>WFD 1.9</b>	3.9	900	1950lm	3900lm	112	3000K/4000K	>80	8.0
<b>WFD 2.6</b>	5.2	1200	2600lm	5200lm	110	3000K/4000K	>80	10.0
<b>WFD 3.2</b>	6.5	1500	3250lm	6500lm	108	3000K/4000K	>80	12.0

Specific higher/lower lumen packages on request (above are LED comparable to T5 lamp options)

### Ordering Options

Description	Suffix Ordering Code
Slim Body Version	/SLIM
Miniature Body Version	/MINI
Ski Slope Body Version	/SKI
60°/30° Body Version	/60°/30°
Exterior Fully Weatherproof Version	/EXT
Dimmable Options (DALI/1-10v/SW-240v/Corridor)	/DALI / 1-10v / SW-240v / CORR
Integral 3hr Emergency or 3hr Self Test	/EM3 or /EM3-SELF
Microwave Motion Detection	/M-Wave
Night Light	/NL
Frosted Diffuser	/F
Clear Stippled Diffuser	/P
Security Driver/Key	/SD
Stainless Steel Version (316/304/430 Grades)	On Request
LED Linear Tube Gear Tray (240v Mains)	/GT-LEDT8
Fluorescent Lamp Version	/T5 or /T8 On Request