



## RECESSED LED DOWNLIGHT

### Body:

White painted aluminium body

### Optic:

Highly polished aluminium reflector  
Opal glass cover

### Application:

Recessed downlight for installation into false ceiling.

### Versions:



B – reflector diameter 130 mm

C – reflector diameter 190 mm

D – reflector diameter 240 mm



EK	P(W)	Lumen	Diam. (mm)	B (mm)	Cutout size (mm)	W (Kg)
SPMI700KO-B	8	750	130	64	122	0,7
SPMI1000KO-C	10	1 000	190	78	178	1,0
SPMI1500KO-C	15	1 500				
SPMI2000KO-C	20	2 100				
SPMI3000KO-C	28	3 000	240	87	225	2,0
SPMI1500KO-D	15	1 500				
SPMI2000KO-D	20	2 100				
SPMI3000KO-D	28	3 000				

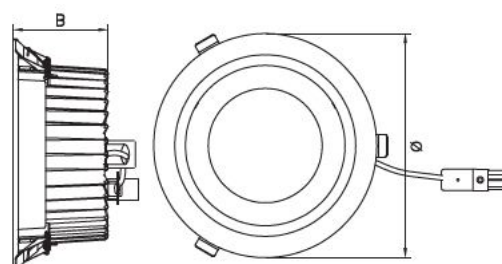

**Codes: SPMI1000KO3V2CB/ND**

SPMI	1000	KO	3	V2	C	B	/ND
Luminaire type							
Light output (lm)							
Cover type: O – opal glass							
Color temperature: 3 = 3000K 4 = 4000K							
Used LEDs							
Body diameter: B – body size 130 mm (4") C – body size 190 mm (5") ring outside diameter D – body size 240 mm (6") ring outside diameter							
Body colour: B – white							
Driver type: ND – no dimmable DIM – dimmable 1-10V DALI – dimmable DALI							

THE MANUFACTURER CONTINUES TO DEVELOP PRODUCTS THROUGHOUT THEIR LIFETIME. THEREFORE, THE COMPANY RESERVES THE RIGHT TO MODIFY MATERIALS, COMPONENTS, AND TECHNICAL PARAMETERS WITHOUT NOTICE. LUMINOUS OUTPUT AND ELECTRICAL LOAD HAVE AN INITIAL TOLERANCE OF +/- 10 % FROM NOMINAL. FAILURE OF ONE LED LIGHT POINT WITHIN A LUMINAIRE DOES NOT IMPAIR FUNCTIONAL PERFORMANCE AND SO IS NOT CLASSIFIED AS REASON FOR COMPLAINT.



2200	2700	3000	4000	5000	6500	MIX	RGB	
×	○	○	●	○	×	×	×	×
ON/OFF	1-10V	DALI	Bluetooth	Bluetooth	Bluetooth	Bluetooth	Bluetooth	Bluetooth
●	○	○	×	×	×	×	○	×

● default ○ optional × not possible

