



<b>PRODUCT MATERIAL</b>	Die-cast aluminium
<b>ADAPTER</b>	48V adapter
<b>LIGHT SOURCE</b>	SMD 3030
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>DRIVER</b>	Including Dali driver
<b>COLORS</b>	● 5 = RAL 9005 black
<b>BEAM ANGLE</b>	▲ 95°
<b>ADJUSTABLE</b>	No
<b>SIZE</b>	900/1200 X 23 X 25mm





**OPTIONS**

<b>WIRELESS DIMMABLE</b>	Zigbee or Casambi
--------------------------	-------------------

**INFORMATION**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

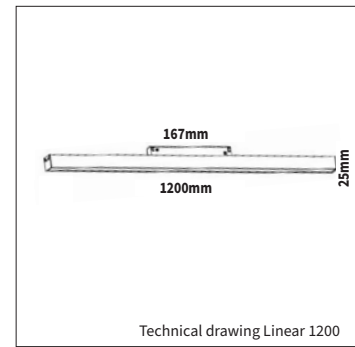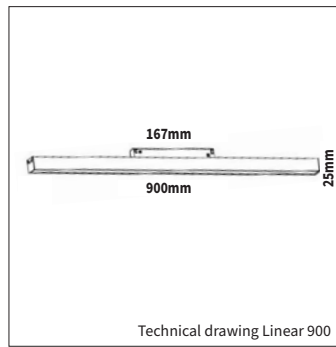

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA	Length
5821.270.90.5	SMD 3030	Nichia	1000-1200lm	28W	43lm/W	2700K	>90	50.000 Hrs	700mA	900mm
5821.300.90.5	SMD 3030	Nichia	1000-1200lm	28W	43lm/W	3000K	>90	50.000 Hrs	700mA	900mm
5822.270.90.5	SMD 3030	Nichia	1400-1600lm	35W	46lm/W	2700K	>90	50.000 Hrs	700mA	1200mm
5822.300.90.5	SMD 3030	Nichia	1400-1600lm	35W	46lm/W	3000K	>90	50.000 Hrs	700mA	1200mm