

SURFACED LED LIGHT FIXTURE

Body:

White (black) painted metal sheet

Optic:

PC reflector + clear PMMA lenses

B50 - white reflector with lenses 50°

B80 - white reflector with lenses 80°

C50 - black reflector with lenses 50°


C80 - black reflector with lenses 80°

Version (body shape)

EPS...SS/44 – square 595x595mm, 4 LED modules

EPS...RM/44 - rectangle 1230x225mm,4 LED modules




EPS...RL/64 - rectangle 1535x225mm, 6 LED modules

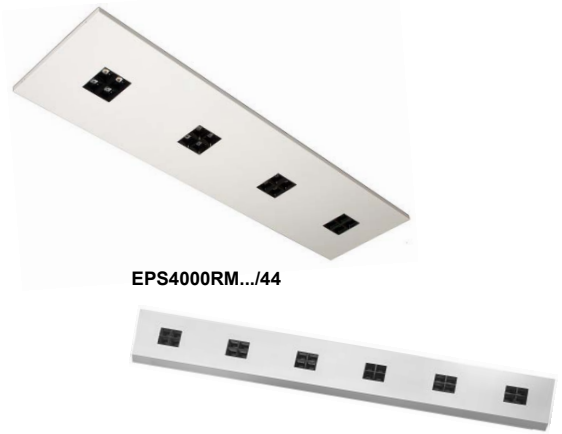


EPS4000RM.../44

EPS6000RL.../64


Clear PMMA lenses combined with either white or black reflectors. Highly efficient lighting systems with darklight effect - light sources and cones of light that are not visible from most places - and yet the light is exactly where it is needed. This almost mystical, inconspicuous, discreet, esthetic lighting effect prevents bright artificial light areas from dominating the room and creates a natural atmosphere.

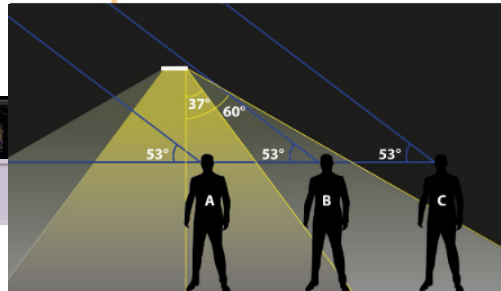



EPS	W	lm		A	B	C	X	Y	kg
		B50, B80	C50, C80						
EPS3000SS... /44	18	2750	2500	595	595	40	540	500	1,8
EPS4000SS... /44	27	3900	3500				1140	-	2,0
EPS3000RM... /44	18	2750	2500	1230	225		1445	-	2,4
EPS4000RM... /44	27	3900	3500	1535	225				
EPS6000RL... /64	44	6400	5800						



EPS B80



EPS B50

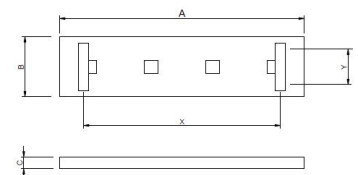




DARKLITE TECHNOLOGY



New generation panel, lens technology, light exactly where it is needed, up to **153lm/W**, **UGR <19** housing white, 60° narrow beam, 90° wide beams and asymmetrical optics, replaceable LED modules and drivers, ultra-flat, ultra-light, SMART LED

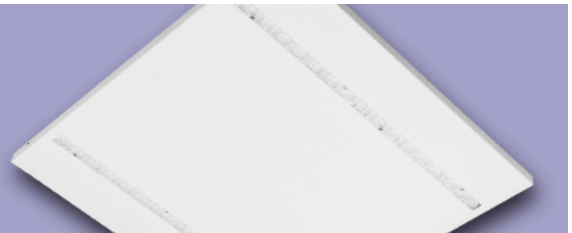

2200	2700	3000	4000	5700	6500	MIX	RGB	
X	○	○	●	○	○	○	X	●
●	○	○	○	○	○	○	X	○

● default ○ optional X not possible



Codes: EPS4000RM3BB80/44/ND

	EPS	4000	RM	3	B	B80	/2	/44	/ND
Luminaire type									
Light output									
Body shape			SS - square - 595x595mm RM - rectangle - 1230x225mm LM - rectangle - 1535x225mm						
Color temperature				2=2700K, 3=3000K, 4=4000K, 5=5700K 6=6500K					
Body color					B - white body C - black body				
Optic:						B - white louvre C - black louvre 50 - narrow 50° 80 - wide 80°			
Nr of LED modules									
Nrof LED modules									
Driver type:									ND - no dimmable DALI - dimmable DALI

THE MANUFACTURER CONTINUES TO DEVELOP PRODUCTS THROUGHOUT THEIR LIFETIME. THEREFORE, THE COMPANY RESERVES THE RIGHT TO MODIFY MATERIALS, COMPONENTS, AND TECHNICAL PARAMETERS WITHOUT NOTICE. LUMINOUS OUTPUT AND ELECTRICAL LOAD HAVE AN INITIAL TOLERANCE OF +/- 10% FROM NOMINAL. FAILURE OF ONE LED LIGHT POINT WITHIN A LUMINAIRE DOES NOT IMPAIR FUNCTIONAL PERFORMANCE AND SO IS NOT CLASSIFIED AS REASON FOR COMPLAINT.