




RECESSED/SURFACED LED LUMINAIRE



1





2

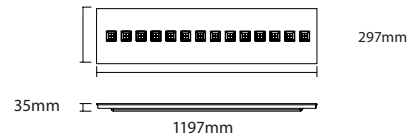

n°	Power Volt	W	(u/h)	(° K)	Ra v	(cd)	(lm)	(°)	(%)	Colour	IP	★ ENERGY ★	
1 MM 07843	230	30	50000	4000	80	-	3500	90	NO	WHITE	20	A	IN
2 MM 07844	230	30	50000	4000	80	-	3500	90	NO	WHITE	20	A	IN
3 MM 071210/MM07610			BUILD-UP FRAME				1200	300	/	600	600		WHITE



3

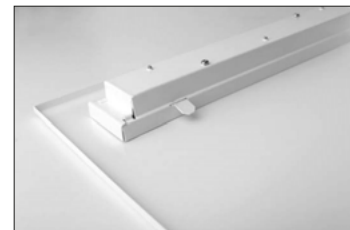

**UGR
19**

Operating temperature -30~+40°C

