




Led track fixture. Created to meet the lighting requirements of commercial areas, sales areas, commercial galleries, common areas. It is compact and easy to assemble, flexible and adjustable.

Colour

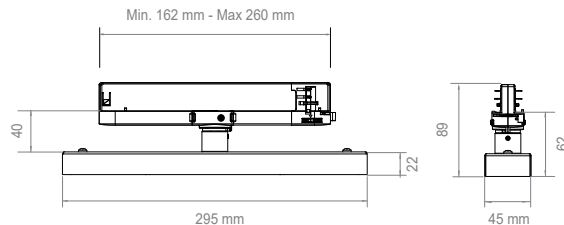

**TRACK** 0,6 Kg **DRIVER INCLUDED** 220-240 V 50/60 Hz **IP 20** **CE** **IECEE**

## TECHNICAL FEATURES

### BODY

Sheet steel

### COOLING

Passive heat dissipation

### POWER

12 W Led - 14,5 W System - XE Version

16 W Led - 19 W System - HF Version

The data relating to wattages is provided as a guideline and is subject to change

### OPTICAL SYSTEM

PMMA lens

### LIFE TIME (TA = 25°C)

Lumen maintenance: L80B50 > 100.000 h - L80B10 > 60.000

### COLOUR RENDERING

CRI>80 (3000 K - 4000 K)

CODE	LENS	LED TECHNICAL DATA	COLOUR	ACCESSORIES
BML	30 30°	<b>XE0W</b> 12 W 2000 lm 3000 K	<b>B</b> BIANCO / WHITE	0
	60 60°	<b>XE0C</b> 12 W 2100 lm 4000 K	<b>N</b> NERO / BLACK	
	90 90°	<b>HF0W</b> 16 W 2600 lm 3000 K	<b>G</b> GRIGIO / GREY	
	<b>AS</b> Asymmetrical	<b>HF0C</b> 16 W 2750 lm 4000 K		
	<b>BW</b> Batwing			

Coding example

**BML30XE0WB0**

BML CODE + 30 LENS + XE0W LED TECHNICAL DATA + B COLOUR + 0 ACCESSORIES

AVAILABLE ON REQUEST

**RAL** DALI 5000K **CASAMBI**