




Led track fixture. Created to meet the lighting requirements of commercial areas, sales areas, commercial galleries, common areas. It is compact and easy to assemble, flexible, adjustable and tiltable.

Colour

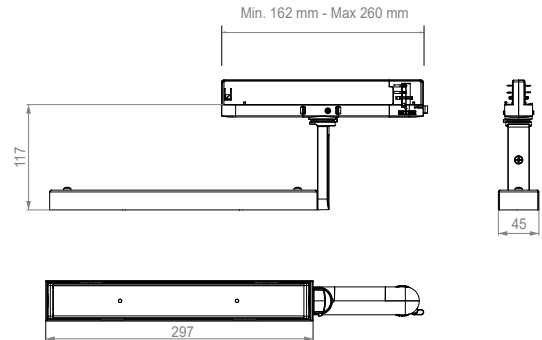

TRACK -- Kg DRIVER INCLUDED 220-240V 50/60 Hz IP 20 CE TECEE CB SCHEME

TECHNICAL FEATURES

BODY
Sheet steel

COOLING
Passive heat dissipation

POWER
12 W Led - 14,5 W System - XE Version
16 W Led - 19 W system - HF Version
The data relating to wattages is provided as a guideline and is subject to change

OPTICAL SYSTEM
PMMA lens

LIFE TIME (TA = 25°C)
Lumen maintenance: L80B50 > 100.000 h - L80B10 > 60.000

COLOUR RENDERING
CRI>80 (3000 K - 4000 K)

CODE	LENS	LED TECHNICAL DATA	COLOUR	ACCESSORIES
BMT	30 30°	XE0W 12 W 2000 lm 3000 K	B WHITE	0
	60 60°	XE0C 12 W 2100 lm 4000 K	N BLACK	
	90 90°	HF0W 16 W 2600 lm 3000 K	G GREY	
	AS Asymmetrical	HF0C 16 W 2750 lm 4000 K		
	BW Batwing			

Coding example

BMT30XE0WB0

BMT CODE + 30 LENS + XE0W LED TECHNICAL DATA + B COLOUR + 0 ACCESSORIES

AVAILABLE ON REQUEST

RAL DALI 5000K CASAMBI

