



Colour



Led track fixture. Created to meet the lighting requirements of commercial areas, sales areas, commercial galleries, common areas. It is compact and easy to assemble, flexible and adjustable.

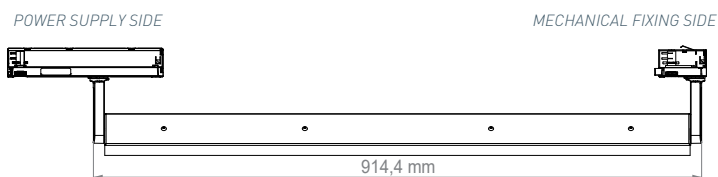

TRACK 2,0 Kg **DRIVER INCLUDED** 220-240V 50/60 Hz **IP 20** **CE**

TECHNICAL FEATURES

Sheet steel and aluminium die-cast joint

COOLING

Passive heat dissipation

POWER

28 W Led - 33 W System

33 W Led - 39 W System - HO Version

The data relating to wattages is provided as a guideline and is subject to change

OPTICAL SYSTEM

PMMA lens

LIFE TIME (TA = 25°C)

maintenance: L80B10 ≥ 55.000 h

COLOUR RENDERING

CRI>80 (3000 K - 4000 K)

CODICE CODE	LENS	LED TECHNICAL DATA	COLOUR	ACCESSORIES
BMG	30 30°			
	60 60°	HE0W 28 W 4650 lm 3000 K	B WHITE	0
	11 110°	HE0C 28 W 4850 lm 4000 K	N BLACK	
	AL Asymmetrical left	HO0W 33 W 5400 lm 3000 K	G GREY	
	AR Asymmetrical right	HO0C 33 W 5650 lm 4000 K		
	BW Batwing			

Coding example

BMG30HE0WB0

BMG CODE + 30 LENS + HE0W LED TECHNICAL DATA + B COLOUR + 0 ACCESSORIES

AVAILABLE ON REQUEST



DALI 3500K

CASAMBI
SOLO / ONLY 28W

