

**LED LINEAR FIXTURE**

**Body:**

White painted (RAL 9003) metal sheet

**Optic:**

- CHR – high rack
- CW – wide 60°
- CEW – extra wide 90°
- CRA – retail asymmetric

**Application:**

- Surface or pendant installation
- Can be installed in line, TOP/R
- TOP..IP23 - high IP protection

**Accessories:**

- ZH/UNI4 – universal 4-wires suspension (one set for 2 luminaires)
- TELSPOJ linear junction set
- TE LHAK suspension for chain
- TOP\_/R - blind parts to complete rows



$\eta_{ef}$  (lm/W)  
141-161

TOP LINEAR


**TOP /R**


**Continuous assembly in a line**

- Surface or pendant installation
- Fittings are equipped with continuous 5-poles wiring 5x1,5 mm<sup>2</sup> with connectors
- Non-dimmable fittings have black connectors and allow 3-phase connection
- Dimmable fittings have blue connectors and allow 1-phase connection with DALI control
- Fittings have connectors at both ends and contain a plastic cap for covering of connectors gap
- For surface mounted installation of lines is not necessary to use the connection part TE LSPOJ.


2200	2700	3000	4000	5700	6500	MIX	RGB	
✗	○	○	●	○	○	✗	✗	●
●	○	○	○	✗	✗	✗	✗	○

● default    ○ optional    ✗ not possible

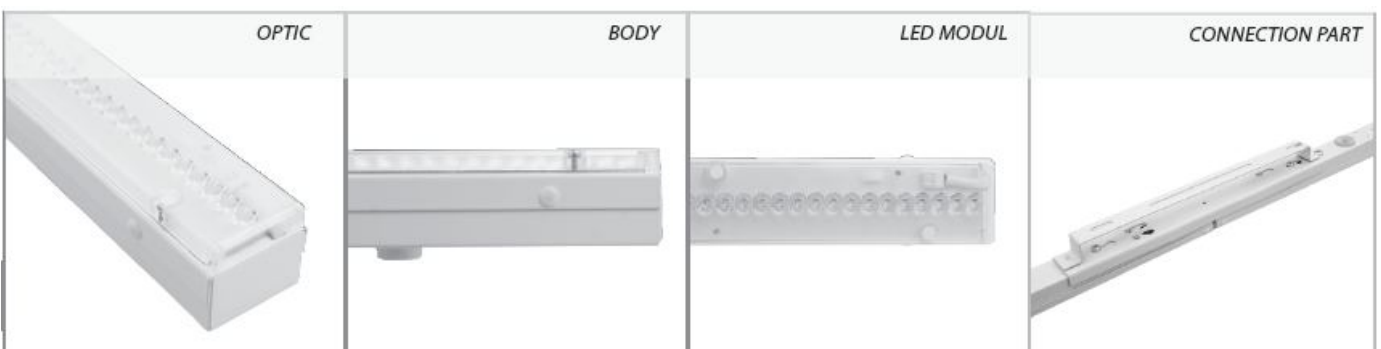





TOP CEW



TOP CHR







TOP CRA




TOP CW

TOP	W	lm	A	X	X1	R	R1	R2	kg
TOP2000S	15	2 300	572	470	X	500	X	X	1
TOP3000S	22	3 100							
TOP3000XM	21	3 200	853	750	733	690	757	853	1,2
TOP4000XM	32	4 700							
TOP4000M	29	4 600	1134	950	1014	980	1037	1134	1,6
TOP6000M	44	6 900							
TOP4000L	23	3 700	1415	1200	1295	1100	1208	1415	2
TOP6000L	37	6 200							
TOP8000L	54	8 700							

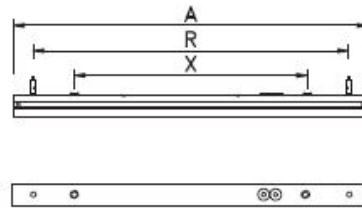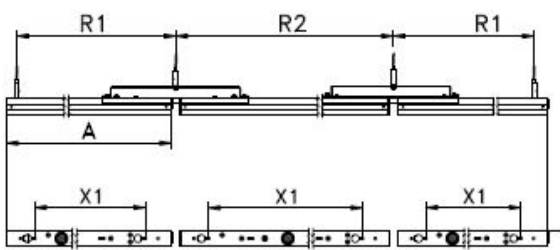

TOP LINEAR / CRA

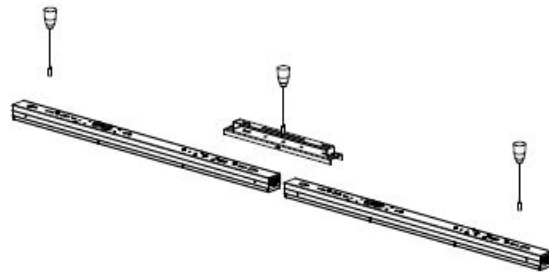

Codes: TOP6000L4CW/ND/R

TOP	6000	L	4	CW	/ND	/R
Luminaire type						
Light output						
Body length:		S = 600 mm M = 1200 mm L = 1500 mm				
Color temperature:		3 = 3000K 4 = 4000K				
Optic				CHR – high rack CW – wide 60° CEW – extra wide 90° CRA – retail asymmetric		
Driver type:					ND – no dimmable DALI – dimmable DALI	
						continuous assembly to line