



The A-170 CIRCUM is the next generation LED High Baylight luminaire. With its pure design it is suitable for both industral and architectural purposes. The efficiency of 170lm/w as well as the low glare rate <19 makes it applicable in almost every situation. Even severe conditions are easily overcome because of te IK09 / IP69 protection level. With a lifespan of 100.000 Hours (L80B20) the A-170 CIRCUM ensures you years of durable and high efficient use.

## **SPECIFICATIONS**

MODEL	Power (W)	Flux (Lumen)
CIRCUM80W	80	13.600
CIRCUM100W	100	17.000
CIRCUM150W	150	25.500
CIRCUM200W	200	34.000
CIRCUM240W	240	40.800

Luminous flux based on 4.000K / CRI 80Ra

AC Input: 100-277V 50/60Hz

Brand of LED Driver: MEANWELL / MOSO

Light Source: 2835 CRI Range: Ra>80

CCT Range : NW(4000K) CW(5700K)

Light Efficieng: 170±5% Lm/W


Beam Angle: 90°

Housing: Aluminum Alloy Waterproof: IP69K & IK09

L80B20@25°C:>100000H


PF: ≥0.95 THD<15% Power Efficiency: ≥0.9 Certifications: TUV, CE, CB, ETL, FCC, SAA

### **DIMENSIONS**





#### **BEAM ANGLE**





































UGR<19



IP69K








warranty

**PRODUCT VIEWS** 



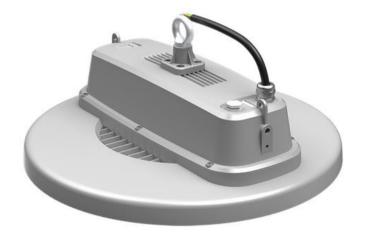













# **ACCESSORIES**



Hook









Bracket

Wire Suspension 2 x 1.000mm

Threaded Rod Fixation

Steel Wire Clamp










































UGR<19

IP69K


warranty

## **INSTALLATION OPTIONS**

#### Hook











## **Threaded Rod**









### **Bracket**













#### **Steel Wire**









































UGR<19



IP69K









warranty

**ELECTRICAL CONNECTION** 

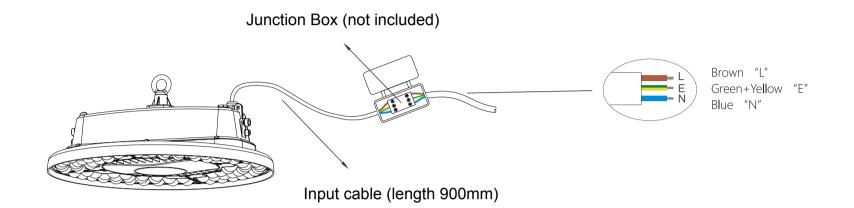

## **PACKAGING INFORMATION**

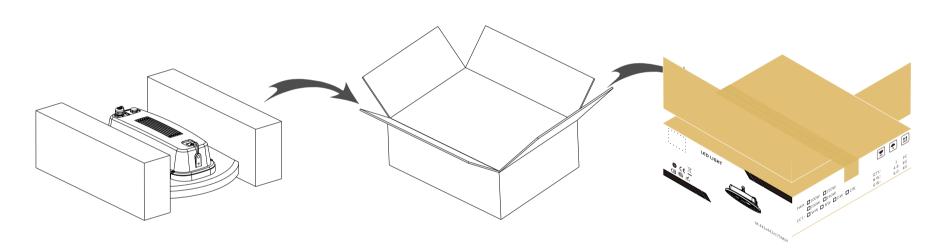

MODEL	QUANTITY	NET WEIGHT	GROSS WEIGHT	DIMENSIONS
A-170 CIRCUM	1pc/box	4,8kg	6,0kg	442x442x175mm























