

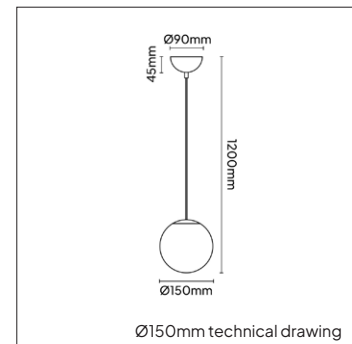


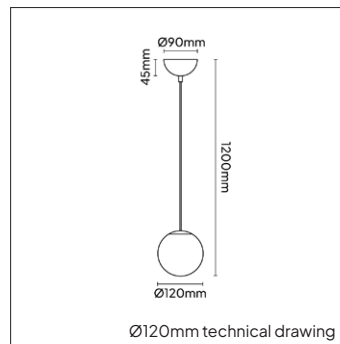

| | |
|-------------------------|-------------------------------------|
| PRODUCT MATERIAL | Die-cast aluminium |
| LIGHT SOURCE | Bridgelux V4HD/V6HD |
| MODULE LIFETIME | Approx. 50.000 hours |
| DRIVER | Including phase cut dimmable driver |
| COLORS | ● 5 = RAL 9005 black |
| ADJUSTABLE | No |
| SIZE | Ø100mm / Ø120mm / Ø150mm |

INFORMATION

! The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

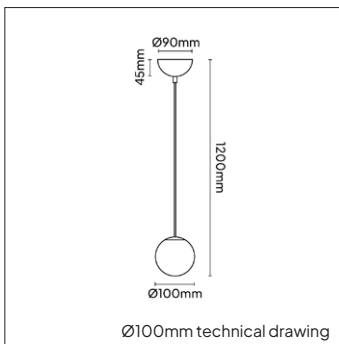

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | mA |
|-------------------------------|-----------|-----------|---------------|--------------|-------------------|-------------------|-----|-------------|-------|
| Ø100mm | | | | | | | | | |
| 5730.273.06.5 | V4HD | Bridgelux | 262lm | 7W | 37lm/W | 2700K | >90 | 50.000 Hrs | 170mA |
| 5730.303.06.5 | V4HD | Bridgelux | 285lm | 7W | 40lm/W | 3000K | >90 | 50.000 Hrs | 170mA |
| Ø120mm | | | | | | | | | |
| 5731.273.08.5 | V6HD | Bridgelux | 262lm | 7W | 37lm/W | 2700K | >90 | 50.000 Hrs | 170mA |
| 5731.303.08.5 | V6HD | Bridgelux | 285lm | 7W | 40lm/W | 3000K | >90 | 50.000 Hrs | 170mA |
| Ø150mm | | | | | | | | | |
| 5732.273.10.5 | V6HD | Bridgelux | 405lm | 10W | 40lm/W | 2700K | >90 | 50.000 Hrs | 250mA |
| 5732.303.10.5 | V6HD | Bridgelux | 440lm | 10W | 44lm/W | 3000K | >90 | 50.000 Hrs | 250mA |
| Ø150mm Recessed canopy | | | | | | | | | |
| 5732.274.10.5 | V6HD | Bridgelux | 405lm | 10W | 40lm/W | 2700K | >90 | 50.000 Hrs | 250mA |
| 5732.304.10.5 | V6HD | Bridgelux | 440lm | 10W | 44lm/W | 3000K | >90 | 50.000 Hrs | 250mA |

LiteTime reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.