





<b>PRODUCT MATERIAL</b>	Aluminium
<b>LIGHT SOURCE</b>	Bridgelux Chip
<b>MODULE LIFETIME</b>	Approx. 30.000 hours
<b>DRIVER</b>	Excluding driver, <b>SELECT OPTION</b>
<b>COLORS (Δ)</b>	<ul style="list-style-type: none"> <li>○ 3 = RAL 9003 white</li> <li>● 5 = RAL 9005 black</li> <li>● 7 = Dark brass</li> <li>● 1 = Dark bronze</li> </ul>
<b>BEAM ANGLE</b>	Optional beam angle, <b>SELECT OPTION</b>
<b>ADJUSTABLE</b>	Horizontally and vertically rotational
<b>SIZE</b>	Ø30 X 65mm



**OPTIONS**


<b>OPTIONAL BEAM ANGLE</b>	15° Art. no.: 4927.000.15.0
	24° Art. no.: 4927.000.24.0
	36° Art. no.: 4927.000.36.0
<b>ANTI-GLARE RING</b>	<b>Black</b> Included
	<b>Gold</b> Art. no.: 4927.030.00.9
	<b>Dark brass</b> Art. no.: 4927.030.00.7
	<b>Dark bronze</b> Art. no.: 4927.030.00.1
<b>HONEYCOMB</b>	Art. no.: 4927.040.00.0
<b>GLASS</b>	<b>Striped</b> Art. no.: 4927.933.96.0
	<b>Frosted</b> Art. no.: 4927.933.90.0
<b>DRIVER OPTIONS</b>	<b>On/off</b> 180mA 1-7W Art. no.: 0107.180.10.1 Size: 115 x 34 x 19mm This driver can only be placed externally
	<b>Phase cut</b> 180mA 7W Art. no.: 4927.180.00.0 Size: 116 x 30 x 21mm This driver can only be placed externally
	<b>DALI</b> 180mA 2-7W Art. no.: 0103.180.40.1 Size: 130 x 30 x 22.2mm This driver can only be placed externally
<b>POWER CABLE OPTIONS</b> Connected to driver/fixture	Europug 2000mm 2 X 0,75 Art. no.: 0502.075.20.0
	Wieland GST 18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0
	Wieland T connector GST 18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0

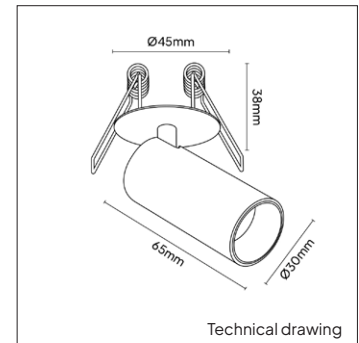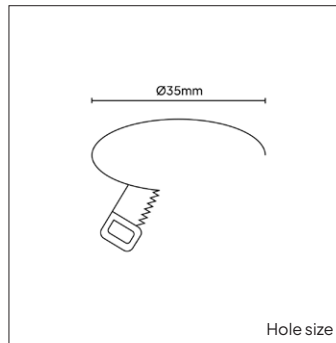

**ANTI-GLARE RING**



**GLASS**



**HONEYCOMB**



**INFORMATION**

Always select a driver option and add the selected driver to your order.

Full warranty only applies when fixture is purchased in combination with recommended driver.

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	CCOLOR TEMPERATURE	CRI	TC LIFETIME	mA
Δ See colors									
4927.270.00.Δ	Chip	Bridgelux	387lm	7W	55lm/W	2700K	>90	30.000 Hrs	180mA
4927.300.00.Δ	Chip	Bridgelux	416lm	7W	59lm/W	3000K	>90	30.000 Hrs	180mA

LiteTime reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.