



η_{ef} (lm/W)
103-139

LAB4000..A..KO..

Recessed LED fittings IP65

Body:

White painted (RAL 9016) galvanized metal sheet

Optic:

KO - opal PS cover
KN - microprismatic PS cover
HO - smooth opal PS cover
PCO - opal PC cover

Application:

Recessed - lighting for installation into false ceiling with visible supporting structure (both 600x600 or 625x625 modules)
Using accessories LABRAM a fitting can be also installed as surface.
Installation into a gypsum plasterboard ceiling can be done with a QVESTRAM frame.
The fixture can not be open - emergency module no available.

Versions:

600 - for 600 module
625 - for 625 module

Accessories:


QVESTRAM - a frame for recessed installation into gypsum plasterboard ceiling
LABRAM - a frame for surface installation / VESTRAMA600 - white painted metal frame for recessed installation into gypsum plasterboard ceiling
RAM100 - aluminium frame for surface installation

Note:

Two IP65 connectors (continuous assembly) as standard



LAB4000..C..KO..

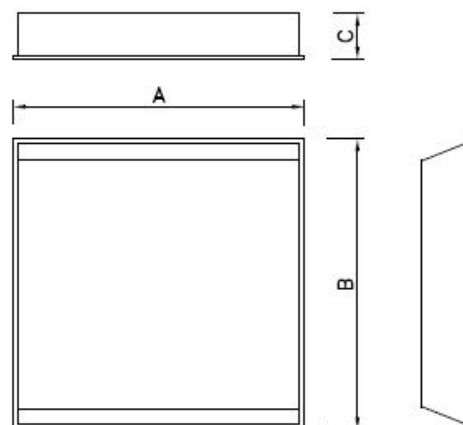

LAB	W	lm		modul 600		modul 625		C	kg
		KO	KN	A	B	A	B		
LAB3000A	23	3 100	3 200	596	596	622	622	85	5,0
LAB4000A	32	4 100	4 400						
LAB5000A	44	5 300	5 700						
LAB6000A	55	6 500	7 300	596	296	622	310	85	2,6
LAB2000B	19	1 950	2 050						
LAB3000C	23	2 900	3 000						
LAB4000C	32	3 900	4 000	1 196	296	1 245	310	85	5,1
LAB6000C	57	6 500	6 900						
LAB4000A / 90	32	3 500	3 700						
LAB5000A / 90	44	4 500	4 850	596	596	622	622	85	5,0
LAB6000A / 90	55	5 500	6 200						




2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	○	○	○	×	×
ON OFF	1-10V	DALI	Bluetooth				INT EXT	
●	×	○	○	×	×	×	×	●


● default

○ optional

×



LAB A KO



LAB A KN



Kódové označení svítidla: LAB4000A3KOND

LAB	4000	A	3	KO	600	ND	/90
Luminaire type							
Light output							
Body shape:							
A – square - 600x600 mm							
C – rectangle - 300x1200 mm							
Color temperature:							
2 = 2700K							
3 = 3000K							
4 = 4000K							
5 = 5700K							
6 = 6500K							
Cover type							
KN – microprizma PS							
KO – opal PS							
PCO – opal PC							
Modul							
Driver type:							
ND – no dimmable							
DALI – dimmable DALI							
/90 - index							Ra90