



SURFACED CEILING FIXTURE

AVAILABLE FINISHES

Standard



Premium




RAL colours



ILLUMINATION OPTIONS

CCT 2700K • CRI >98Ra • 800Lm
CCT 3000K • CRI >98Ra • 900Lm

LIGHT BEAM ANGLE




FIXTURE OPTIONS



[View product on website](#)

Fixture Specifications

Housing material	Aluminium
Luminaire type	Surface mounted
LED module	Bridgelux V6 HD
Driver	Triac dimmable LED driver
Power	10W
Expected lifetime	L90/B10 @ 100.000h
Photobiological safety	RG1 Unlimited
Power factor	>0.9
UGR	<12 for 24° • <15 for 36°
Colour consistency	3 SDCM
Warranty	5 years

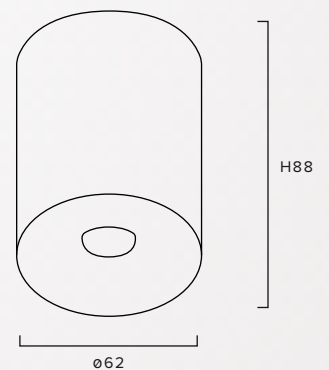

FIXTURE WEIGHT 321 grams

